Sello de pared de compresión

Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	Rubber
Prop 65 label required?	Yes

Product information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

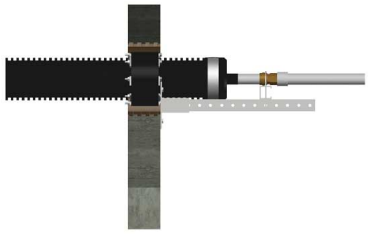

	Part name	Part no.	Inner diameter pipe [inch]	Outer diameter pipe [inch]	Subcomponent Material	Weight per UOM [lbs/UOM]
✔	Compression Wall Seal for 2.7" Jacket	1007358	2.7559	4.7638	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	2.6
	Compression Wall Seal for 5.5" Jacket	1007360	5.5118	7.874	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	5.1
	Compression Wall Seal for 6.9" Jacket	1007361	6.9685	9.7638	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	7.8
	Compression Wall Seal for 7.9" Jacket	1007362	7.9528	9.8819	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	6.1

Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

Related applications

Pre-Insulated Pipe Systems

Radiant Heating and Cooling Systems

Permafrost Protection Systems

Turf Conditioning Systems

Notes

Core Drill OD - 4.75""

Core Drill OD - 8"

Core Drill OD - 10"

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved