

Codos multipuerto en ramal de EP para aplicaciones comerciales


uponor

Project information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	Engineered Polymer
End type 2	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

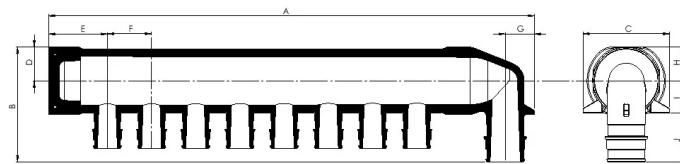

Product information and application use

Engineered polymer (EP) branch multi-port elbows feature an integrated 3/4" or 1" ProPEX® inlet with 1/2" ProPEX branch outlets. The elbows are designed for commercial plumbing applications to eliminate the need for multiple connections. Product includes EP Mounting Clips (F7051250) with Phillips self-tapping screws.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips	Q2087550	9.89	2.325	1.768	0.685	1.2	0.9	0.59	0.685	0.65	0.719
1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips	Q2101000	11.75	2.561	1.768	0.685	1.2	0.9	0.75	0.685	0.65	0.719

Part name	Part no.	End Type 1	Weight per UOM [lbs/UOM]
3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips	Q2087550	ProPEX 3/4"	0.39
1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips	Q2101000	ProPEX 1"	0.47

Part name	Part no.	Codes	Standards	Listings
Codos multipuerto en ramal de EP para aplicaciones comerciales	All	UPC IMC IPC IBC IRC UMC NSPC NPC of Canada	ASTM E119/UL 263 ASTM F1960 ASTM E814/ULC S115 CSA B137.5 NSF/ANSI 14 NSF/ANSI/CAN 61 ASTM F877 ULC S102.2 ULC S101	cNSFus-pw IAPMO-ES ICC-ES-PMG cQAlus P321 UL U.P.Code HUD MR 1269

Installation

The mounting clips feature self-tapping screws, which are appropriate for wood or metal studs. Simply attach the clips to the multi-port and fasten the clips to the mounting surface.

Related applications

PEX-a Plumbing Systems

Footnotes	Contact information
-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p> <p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p>