

Adaptadores con rosca macho de EP ProPEX

Project information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:


Technical data

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Product information and application use

The ProPEX® engineered polymer (EP) male threaded adapter combines durable polymer material with the reliable ASTM F1960 connection professionals have come to depend on for a solution that stands the test of time.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

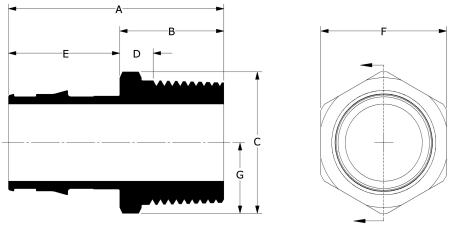

Part name	Part no.	Cv	End Type 1	End Type 2
ProPEX EP Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q4625050	5	ProPEX 1/2"	MNPT 1/2"
ProPEX EP Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q4627575	11.3	ProPEX 3/4"	MNPT 3/4"
ProPEX EP Male Threaded Adapter, 1" PEX x 1" NPT	Q4621010	19.9	ProPEX 1"	MNPT 1"

Part name	Part no.	Codes	Standards	Listings
Adaptadores con rosca macho de EP ProPEX	All	UPC IRC IPC NPC of Canada	ASTM F1960 CSA B137.5 NSF-61 NSF-14 NSF-372 ASTM F877	U.P.Code cNSFus-pw

Installation	Related applications
Use a minimum of three wraps of PTFE thread-seal tape. If using thread-sealant paste in addition to tape, consult the paste manufacturer for compatibility with polymer fittings. To avoid cross-threading, turn the fitting counterclockwise against the female threads until the threads drop into place. Then, tighten accordingly	PEX-a Plumbing Systems Plumbing Systems Pre-Insulated Pipe Systems

Footnotes	Contact information
-	<div>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</div> <div>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</div>