

Adaptadores con rosca hembra de bronce ProPEX

Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Product information and application use

ProPEX® brass female threaded adapters connect Uponor PEX pipe to female NPT threads. Use the adapters in hydronic heating and cooling systems. One end of the adapter is manufactured with the Uponor ProPEX fitting for connection to Wirsbo hePEX™ pipe; the other end is manufactured to adapt a male thread. These adapters are not safe for direct burial in soil. Note: Not for potable use.

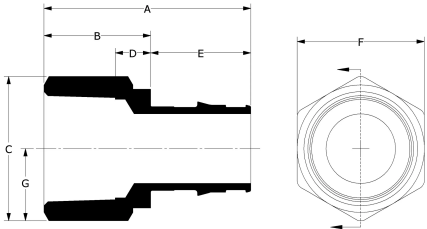

Part name	Part no.	End Type 1	End Type 2	Cv
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	ProPEX 1/2"	FNPT 1/2"	4.8
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	ProPEX 5/8"	FNPT 3/4"	-
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	ProPEX 3/4"	FNPT 3/4"	12
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	ProPEX 3/4"	FNPT 1"	10.8
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	ProPEX 1"	FNPT 1"	19.7
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	ProPEX 1-1/4"	FNPT 1-1/4"	30.8
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	ProPEX 1-1/2"	FNPT 1-1/2"	40.9
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	ProPEX 2"	FNPT 2"	77.7

Part name	Part no.	Codes	Standards	Listings
Adaptadores con rosca hembra de bronce ProPEX	All	IMC IBC IRC NPC of Canada UMC	ASTM F1960 CSA B137.5 ASTM F877	IAPMO-ES ICC-ES-PMG cNSFus-rfh
In addition, the following parts have additional codes, standards, or listings:				
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050		NSF/ANSI 14	
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375		NSF/ANSI 14	
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575		NSF-14	
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510		NSF-14	
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010		NSF/ANSI 14	
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313		NSF/ANSI 14	
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515		NSF/ANSI 14	
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020		NSF/ANSI 14	

Installation		Related applications	
Use the appropriate ProPEX ring for Uponor PEX pipe (sold separately). Refer to the Uponor Radiant Installation Handbook, Complete Design Assistance Manual (CDAM), or Hydronic Piping Design Assistance Manual (HPDAM) for additional information.		Radiant Heating and Cooling Systems	
		Permafrost Protection Systems	
		Turf Conditioning Systems	
		Hydronic Piping Systems	
Footnotes		Contact information	
-		Uponor Inc.	
		5925 148th Street West	
		Apple Valley, MN 55124	
		T 800.321.4739	
		F 952.891.2008	
		Uponor Ltd.	
		6510 Kennedy Road	
		Mississauga, ON L5T 2X4	
		T 888.594.7726	
		F 800.638.9517	