

Uniones de compensación para colectores TruFLOW Classic



Project Information


| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Fecha de envío: |
| Contractor: | Presentada por: |
| Manufacturer's representative: | Approved by: |

Technical data

| | |
|-------------------------|--|
| Material | Brass |
| End type 1 | ISO 228-G 1-1/4" |
| End type 2 | ISO 228-G 1-1/4" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes |

Product Information and application use

TruFLOW™ classic manifold offset unions feature an R32 union by 1 1/4" BSP male connection for easy alignment of the supply and return piping at the manifold.

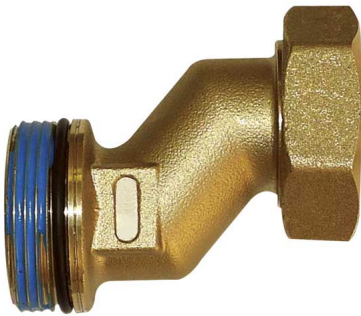

| Part name | Part no. | Codes | Standards | Listings |
|---|----------|-------|-----------------------------------|----------|
| Uniones de compensación para colectores TruFLOW Classic | A2620045 | - | R32: ISO 228-G 1 1/4" ASTM F877 | - |

Installation

Use the TruFLOW Classic Manifold Offset Union to make the connection between TruFLOW manifolds and R32 manifold adapters. Remove the existing straight union assembly from the manifold to install this offset union. Use silicone oil on the male threads to ease installation. Use only the following Uponor TruFLOW manifold accessories: Replacement O-ring for 1 1/4" BSP Connections (A2620008) and Replacement Gasket for R32 Union Connections (A2620005). For more information, refer to the Uponor TruFLOW Classic Manifold Instruction Sheet.

Related applications

Radiant Heating and Cooling Systems

Notes

Connection:
1 1/4" male BSP x R32

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517