

# Tuberías mecánicas de PP-RCT de Uponor, SDR 17.6 con fibra



## Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

## Technical data

Temp/pressure ratings	73 °F (23 °C) at 133 psi (9.2 bar)
	120 °F (49 °C) at 87 psi (6 bar)
	180 °F (82 °C) at 50 psi (3.5 bar)
Prop 65 label required?	No

## Product information and application use

Use Uponor PP-RCT mechanical pipe to convey fluid for hydronic heating and cooling or industrial applications. The pipe contains a fiber layer coextruded into the mid-wall of the pipe to reduce expansion/contraction with temperature changes.

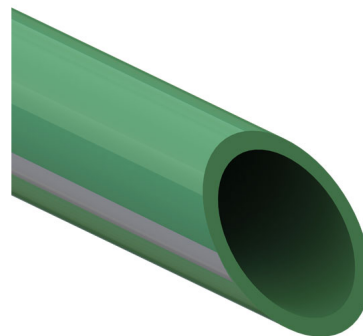

Part name	Part no.	Codes	Standards	Listings
Tuberías mecánicas de PP-RCT de Uponor, SDR 17.6 con fibra	All	CMC IMC UMC	ASTM E84 NSF-14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

## Installation

Use approved butt-fusion or socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

## Related applications

Hydronic heating and cooling systems  
Industrial

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517