

Adaptadores de bridas de PP-RCT de Uponor (fusión de toma)



Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	PP-RCT
End type 2	Flange
	180 °F (82 °C) at 100 psi (6.9 bar)

Product information and application use

Use Uponor PP-RCT flange adapters with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

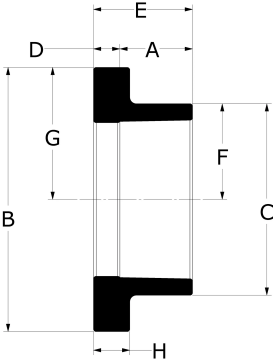

Part name	Part no.	End Type 1
Uponor PP-RCT Flange Adapter, 1	PR2981000	Socket 1"
Uponor PP-RCT Flange Adapter, 1 1/4	PR2981250	Socket 1-1/4"
Uponor PP-RCT Flange Adapter, 1 1/2	PR2981500	Socket 1-1/2"
Uponor PP-RCT Flange Adapter, 2	PR2982000	Socket 2"
Uponor PP-RCT Flange Adapter, 2 1/2	PR2982525	Socket 2-1/2"
Uponor PP-RCT Flange Adapter, 3	PR2983030	Socket 3"

Part name	Part no.	Codes	Standards	Listings
Adaptadores de bridas de PP-RCT de Uponor (fusión de toma)	All	UPC IRC IPC NPC of Canada UMC CMC CPC IMC	NSF/ANSI/CAN 61 ASTM E84 NSF/ANSI 14 NSF/ANSI 51 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation	Related applications
Use approved socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial

Footnotes	Contact information
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517