

# Adaptadores para abrazaderas de sujeción de bronce sin plomo (LF) ProPEX® de Uponor



## Project Information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

## Technical data

Material	PP-RCT
Temp/pressure ratings	73 °F (23 °C) at 340 psi (23.44 bar)
	140 °F (60 °C) at 190 psi (13.1 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)

## Product Information and application use

Use Uponor ProPEX lead-free (LF) brass adapters with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

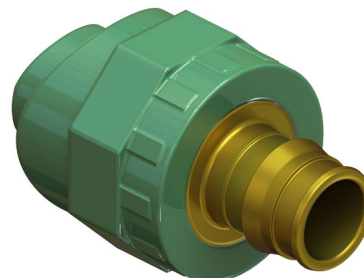

Part name	Part no.	Codes	Standards	Listings
Adaptadores para abrazaderas de sujeción de bronce sin plomo (LF) ProPEX® de Uponor	All	CMC IMC UMC	ASTM F1960 ASTM E84 NSF-14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

## Installation

For the PEX side, use the appropriate ProPEX ring and fitting. For the PP-RCT side, use approved fusion connection methods. For additional information, refer to the Uponor PP-RCT manual.

## Related applications

Hydronic heating and cooling systems  
Industrial

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517