

# Conectores en T reductores de PP-RCT de Uponor (fusión de toma)



## Project information


|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Fecha de envío: |
| Contractor:                    | Presentada por: |
| Manufacturer's representative: | Approved by:    |

## Technical data

|                       |                                      |
|-----------------------|--------------------------------------|
| Material              | PP-RCT                               |
| Temp/pressure ratings | 73 °F (23 °C) at 340 psi (23.44 bar) |
|                       | 140 °F (60 °C) at 190 psi (13.1 bar) |
|                       | 180 °F (82 °C) at 100 psi (6.9 bar)  |

## Product information and application use

Use Uponor PP-RCT reducing tees with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

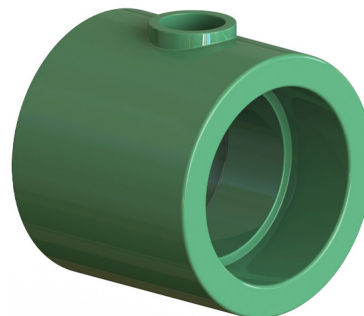

| Part name   | Part no. | Codes       | Standards                              | Listings  |
|---|----------|-------------|--|---|
| Conectores en T reductores de PP-RCT de Uponor (fusión de toma) | All      | CMC IMC UMC | ASTM E84 NSF-14 ASTM F2389 CSA B137.11 | ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775 |

## Installation

Use approved socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

## Related applications

Hydronic heating and cooling systems  
Industrial

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517