
Codos de bronce ProPEX

Project information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	Brass
End type 1	ProPEX 5/8"
End type 2	ProPEX 5/8"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

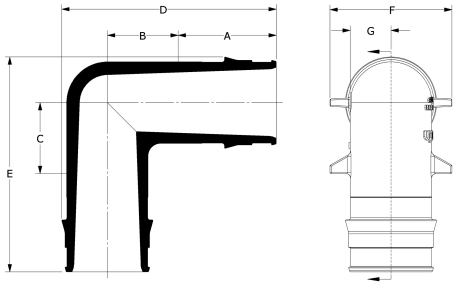

Product information and application use

Uponor 5/8" ProPEX® brass elbows are available for use in hydronic heating and cooling systems. The elbows are manufactured with the ProPEX fitting for connections to Uponor crosslinked polyethylene (PEX) tubing.

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX Brass Elbow, 5/8" PEX x 5/8" PEX	Q4710625	0.866	0.625	0.35	1.865	1.591	1.04	0.35	0.13

Part name	Part no.	Codes	Standards	Listings
Codos de bronce ProPEX	Q4710625	IMC|IBC|IRC|NPC of Canada|UMC	ASTM F1960|CSA B137.5|NSF/ANSI 14|ASTM F877	IAPMO-ES|ICC-ES-PMG|cNSFus-rfh

Installation

Use 5/8" ProPEX Ring with Stop (Q4690625) for connecting the tubing. Refer to the Uponor ProPEX Connections Instructional Guide for additional information.

Related applications

Radiant Heating and Cooling Systems

Permafrost Prevention Systems

Turf Conditioning Systems

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved