

Adaptadores con rosca hembra de bronce de Uponor

Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Temp/pressure ratings	73 °F (23 °C) at 340 psi (23.44 bar)
	140 °F (60 °C) at 190 psi (13.1 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
Prop 65 label required?	Yes

Product information and application use

Uponor brass male threaded adapters are shorter in length and do not have “wrench flats” on the brass insert. The female adapter is flush at the base, and the male brass insert features a smooth, machined surface.

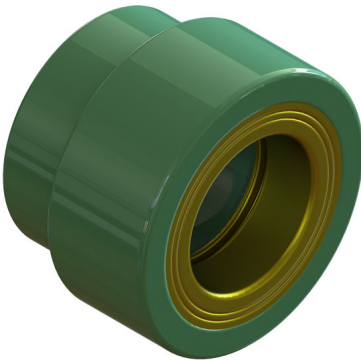

Part name	Part no.	End Type 1	End Type 2
Uponor Brass Female Threaded Adapter, 1" PP-RCT x 1" NPT	PR5571010	Socket 1"	FNPT 1"
Uponor Brass Female Threaded Adapter, 1" PP-RCT x 3/4" NPT	PR5571075	Socket 1"	FNPT 3/4"
Uponor Brass Female Threaded Adapter, 1 1/4" PP-RCT x 1" NPT	PR5571310	Socket 1-1/4"	FNPT 1"
Uponor Brass Female Threaded Adapter, 1 1/4" PP-RCT x 1 1/4" NPT	PR5571313	Socket 1-1/4"	FNPT 1-1/4"
Uponor Brass Female Threaded Adapter, 2" PP-RCT x 2" NPT	PR5572020	Socket 2"	FNPT 2"
Uponor Brass Female Threaded Adapter, 1/2" PP-RCT x 1/2" NPT	PR5575050	Socket 1/2"	FNPT 1/2"
Uponor Brass Female Threaded Adapter, 3/4" PP-RCT x 1/2" NPT	PR5577550	Socket 3/4"	FNPT 1/2"
Uponor Brass Female Threaded Adapter, 3/4" PP-RCT x 3/4" NPT	PR5577575	Socket 3/4"	FNPT 3/4"
Uponor Brass Female Threaded Adapter, 1 1/2" PP-RCT x 1 1/2" NPT	PR5571515	Socket 1-1/2"	FNPT 1-1/2"

Part name	Part no.	Codes	Standards	Listings
Adaptadores con rosca hembra de bronce de Uponor	All	CMC IMC UMC	ASTM E84 NSF-14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation	Related applications
Use approved connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial

Footnotes	Contact information
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008  Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517