# Codos TotalFit

## Project information


| | |
|---|---|
| Job name: | Location: |
| Engineer: | Fecha de envío: |
| Contractor: | Presentada por: |
| Manufacturer's representative: | Approved by: |


## Technical data

| | |
|---|---|
| Material | Engineered Polymer |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | No |

## Product information and application use

TotalFit™ is the professional-grade engineered polymer (EP) push-to-connect solution that provides greater value for residential projects with the same versatility and speed as brass push-to-connect fittings for PEX, PE-RT, CPVC, and copper piping systems.

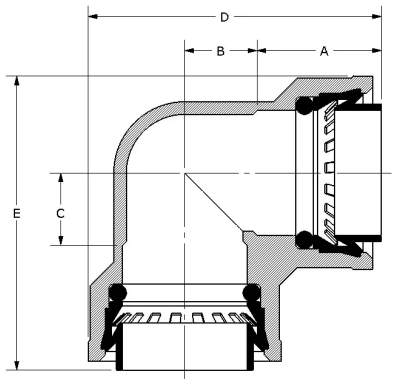

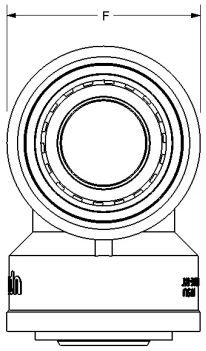
| Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | End Type 1 | End Type 2 | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|---|---|---|---|
| TotalFit Elbow, 1/2" x 1/2 | TF4760500 | 0.913 | 0.37 | 0.368 | 1.848 | 1.846 | 1.13 | TotalFit 1/2" | TotalFit 1/2" | 0.05 |
| TotalFit Elbow, 3/4" x 3/4 | TF4760750 | 1.067 | 0.492 | 0.492 | 2.287 | 2.287 | 1.457 | TotalFit 3/4" | TotalFit 3/4" | 0.09 |
| TotalFit Elbow, 1" x 1 | TF4761000 | 1.134 | 0.657 | 0.657 | 2.671 | 2.671 | 1.76 | TotalFit 1" | TotalFit 1" | 0.13 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| Codos TotalFit | All | UPC\|IMC\|IPC\|IRC\|UMC\|NPC of Canada\|CPC\|CMC | NSF/ANSI 14\|NSF/ANSI/CAN 61\|NSF/ANSI/CAN 372\|ASTM F877\|ASSE 1061 | IAPMO K-13573\|IAPMO K-13572\|IAPMO K-13571 |

## Installation

Install on PEX, PE-RT, CPVC, and copper piping systems. Use deburr and depth tool to remove excess material or burrs and mark the appropriate depth on pipe. If using flexible PEX or PE-RT, install the insert inside the pipe first before making the connection. Refer to the Uponor TotalFit Instruction Sheet for additional information.

## Related applications

Plumbing

Hydronic Heating & Cooling

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved