

Módulo de comunicación Smatrix Pulse (R-208), piezas de reemplazo



Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Operating temperature min. [°F]	32 °f
Operating temperature max. [°F]	113 °f
Ambient temperature min. [F]	-4 °f
Ambient temperature max. [F]	158 °f
Ambient humidity non-condensing max [%]	85
Prop 65 label required?	Yes

Product information and application use

The Smatrix Pulse Communication Module (R-208) offers expanded functionality for the Smatrix Pulse wireless control system, including comfort setting, room bypass, and supply temperature monitoring, along with connectivity to the Smatrix Pulse App for remote system control.

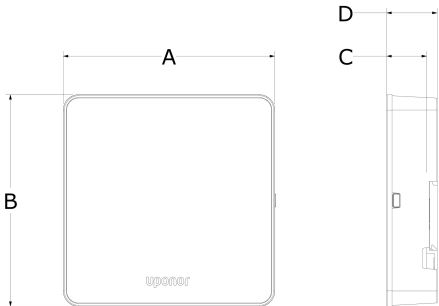

C: HEIGHT WITH STANDARD BACK-MOUNT CASE
D: HEIGHT WITH DIN-RAIL BACK-MOUNT CASE

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	Operating voltage AC [VAC]	Weight per UOM [lbs/UOM]
Smatrix Pulse Communication Module (R-208), replacement part	A3801208	4.331	4.331	0.827	1.024	115	0.35

Part name	Part no.	Codes	Standards	Listings
Módulo de comunicación Smatrix Pulse (R-208), piezas de reemplazo	A3801208	-	FCC KDB996369 D04 IC RSS-210 ICC RSS-Gen FCC 47 CFR Part 15	IC 7664A-SM4NA1 FCC ID V9MSM4NA1

Installation

Related applications

Refer to the Smatrix Pulse Installation and Operation Manual for installation information.

- Radiant
- Hydronic Heating & Cooling
- Tools & Accessories

Footnotes

Contact information

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---