

ChlorFIT Reductor Casquillo

Project information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Fecha de envío: |
| Contractor:                    | Presentada por: |
| Manufacturer's representative: | Approved by:    |


Technical data

Material CPVC

Product information and application use

Utilice los bujes reductores de CPVC Corzan® ChlorFIT® Schedule 80 de Uponor en sistemas de agua potable fría y caliente, así como en aplicaciones hidráulicas de calefacción y refrigeración.

Corzan® es una marca comercial registrada de Lubrizol Advanced Materials, Inc.

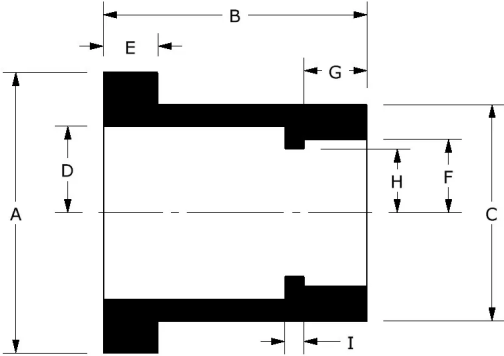

| Part name                                                     | Part no. | A<br>[inch] | B<br>[inch] | C<br>[inch] | D<br>[inch] | E<br>[inch] | F<br>[inch] | G<br>[inch] | H<br>[inch] | I<br>[inch] | End<br>Type<br>1 |
|---------------------------------------------------------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------------|
| 3/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837101  | 1.363       | 1.281       | 1.05        | 0.42        | 0.265       | 0.356       | 0.306       | 0.31        | 0.093       | Spigot<br>3/4"   |
| 1" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837130  | 1.732       | 1.13        | 1.315       | 0.42        | 0.265       | 0.472       | 0.128       | 0.313       | 0.12        | Spigot<br>1"     |
| 1" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837131  | 1.732       | 1.13        | 1.315       | 0.525       | 0.265       | 0.472       | 0.002       | 0.418       | 0.12        | Spigot<br>1"     |
| 1-1/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)   | 9837166  | 2.026       | 1.563       | 1.66        | 0.42        | 0.288       | 0.631       | 0.496       | 0.311       | 0.178       | Spigot<br>1-1/4" |
| 1-1/4" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)   | 9837167  | 2.183       | 1.53        | 1.66        | 0.525       | 0.28        | 0.639       | 0.402       | 0.412       | 0.12        | Spigot<br>1-1/4" |
| 1-1/4" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837168  | 2.183       | 1.531       | 1.66        | 0.657       | 0.28        | 0.64        | 0.278       | 0.524       | 0.12        | Spigot<br>1-1/4" |
| 1-1/2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)   | 9837209  | 2.413       | 1.656       | 1.9         | 0.311       | 0.28        | 0.75        | 0.654       | 0.311       | 1.002       | Spigot<br>1-1/2" |
| 1-1/2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)   | 9837210  | 2.413       | 1.665       | 1.9         | 0.525       | 0.28        | 0.743       | 0.537       | 0.412       | 0.12        | Spigot<br>1-1/2" |
| 1-1/2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837211  | 2.465       | 1.665       | 1.9         | 0.657       | 0.28        | 0.743       | 0.412       | 0.525       | 0.12        | Spigot<br>1-1/2" |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS) | 9837212  | 2.442       | 1.67        | 1.9         | 0.83        | 0.28        | 0.75        | 0.292       | 0.69        | 0.12        | Spigot<br>1-1/2" |
| 2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837247  | 2.979       | 1.78        | 2.375       | 0.42        | 0.28        | 0.97        | 0.778       | 0.311       | 0.12        | Spigot<br>2"     |
| 2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837248  | 2.956       | 1.781       | 2.375       | 0.525       | 0.28        | 0.97        | 0.653       | 0.412       | 0.12        | Spigot<br>2"     |
| 2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837249  | 2.956       | 1.781       | 2.375       | 0.657       | 0.28        | 0.97        | 0.528       | 0.524       | 0.12        | Spigot<br>2"     |
| 2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837250  | 2.979       | 1.8         | 2.375       | 0.83        | 0.28        | 0.97        | 0.422       | 0.69        | 0.12        | Spigot<br>2"     |
| 2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837251  | 2.956       | 1.78        | 2.375       | 0.95        | 0.28        | 0.97        | 0.277       | 0.738       | 0.12        | Spigot<br>2"     |
| 2-1/2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS) | 9837291  | 3.533       | 2.2         | 2.875       | 0.95        | 0.37        | 1.148       | 0.697       | 0.785       | 0.12        | Spigot<br>2-1/2" |
| 2-1/2" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837292  | 3.533       | 2.078       | 2.875       | 1.188       | 0.25        | 1.23        | 0.369       | 1.01        | 0.2         | Spigot<br>2-1/2" |
| ✓ 3" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837335  | 4.272       | 2.415       | 3.5         | 0.657       | 0.457       | 1.436       | 1.078       | 0.487       | 0.195       | Spigot<br>3"     |
| 3" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837337  | 4.261       | 2.4         | 3.5         | 0.95        | 0.45        | 1.435       | 0.817       | 0.815       | 0.2         | Spigot<br>3"     |
| 3" x 2" CPVC 80 Reducing Bushing, Flush Style                 | 9837338  | 4.261       | 2.4         | 3.5         | 1.188       | 0.38        | 1.435       | 0.691       | 1.01        | 0.2         | Spigot           |

|                                                                       |           |        |       |       |       |       |       |       |       |       |  |           |
|-----------------------------------------------------------------------|-----------|--------|-------|-------|-------|-------|-------|-------|-------|-------|--|-----------|
| (SpgxS)                                                               |           |        |       |       |       |       |       |       |       |       |  | 3"        |
| 3" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)             | 9837339   | 4.261  | 2.313 | 3.5   | 1.438 | 0.38  | 1.54  | 0.323 | 1.2   | 0.2   |  | Spigot 3" |
| 4" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837420   | 5.485  | 2.708 | 4.5   | 1.188 | 0.38  | 1.895 | 0.949 | 1     | 0.25  |  | Spigot 4" |
| 4" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed     | 9837421FB | 5.626  | 3.043 | 4.5   | 1.437 | 0.684 | 1.81  | 0.517 | 1.654 | 0.633 |  | Spigot 4" |
| 4" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837422   | 5.485  | 2.688 | 4.5   | 1.75  | 0.38  | 1.99  | 0.548 | 1.5   | 0.25  |  | Spigot 4" |
| 6" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed     | 9837529FB | 8.011  | 3.957 | 6.625 | 1.437 | 0.816 | 2.848 | 1.459 | 1.558 | 0.605 |  | Spigot 6" |
| 6" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837530   | 7.944  | 3.59  | 6.625 | 1.75  | 0.496 | 2.89  | 1.45  | 1.56  | 0.25  |  | Spigot 6" |
| 6" x 4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837532   | 7.944  | 3.59  | 6.625 | 2.25  | 0.496 | 2.89  | 1.07  | 2     | 0.25  |  | Spigot 6" |
| 8" x 4" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed, 2 Step | 9837582FB | 10.476 | 5.357 | 8.625 | 2.25  | 1.261 | 3.702 | 1.178 | 3.054 | 1.933 |  | Spigot 8" |
| 8" x 6" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837585   | 10.254 | 4.66  | 8.625 | 3.313 | 0.56  | 3.78  | 1.26  | 3.125 | 0.38  |  | Spigot 8" |

| Part name                                                         | Part no.  | End Type 2    | Operating Temperature 1 [°F]     | Operating Temperature 2 [°F]      | Weight per UOM [lbs/UOM] |
|-------------------------------------------------------------------|-----------|---------------|----------------------------------|-----------------------------------|--------------------------|
| 3/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837101   | Socket 1/2"   | 73 °F (23 °C) at 690 psi (23 °C) | 180 °F (82 °C) at 170 psi (82 °C) | 0.03                     |
| 1" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)           | 9837130   | Socket 1/2"   | 73 °F (23 °C) at 630 psi (23 °C) | 180 °F (82 °C) at 155 psi (82 °C) | 0.07                     |
| 1" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)           | 9837131   | Socket 3/4"   | 73 °F (23 °C) at 630 psi (23 °C) | 180 °F (82 °C) at 155 psi (82 °C) | 0.05                     |
| 1-1/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837166   | Socket 1/2"   | 73 °F (23 °C) at 520 psi (23 °C) | 180 °F (82 °C) at 130 psi (82 °C) | 0.11                     |
| 1-1/4" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837167   | Socket 3/4"   | 73 °F (23 °C) at 520 psi (23 °C) | 180 °F (82 °C) at 130 psi (82 °C) | 0.11                     |
| 1-1/4" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837168   | Socket 1"     | 73 °F (23 °C) at 520 psi (23 °C) | 180 °F (82 °C) at 130 psi (82 °C) | 0.11                     |
| 1-1/2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837209   | Socket 1/2"   | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.16                     |
| 1-1/2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)       | 9837210   | Socket 3/4"   | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.17                     |
| 1-1/2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837211   | Socket 1"     | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.14                     |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837212   | Socket 1-1/4" | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.09                     |
| 2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)           | 9837247   | Socket 1/2"   | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.23                     |
| 2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)           | 9837248   | Socket 3/4"   | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.24                     |
| 2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)             | 9837249   | Socket 1"     | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.24                     |
| 2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837250   | Socket 1-1/4" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.22                     |
| 2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837251   | Socket 1-1/2" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.18                     |
| 2-1/2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)     | 9837291   | Socket 1-1/2" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.39                     |
| 2-1/2" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837292   | Socket 2"     | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.26                     |
| ✓ 3" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)           | 9837335   | Socket 1"     | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C)  | 1.03                     |
| 3" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837337   | Socket 1-1/2" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C)  | 0.74                     |
| 3" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)             | 9837338   | Socket 2"     | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C)  | 0.79                     |
| 3" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)         | 9837339   | Socket 2-1/2" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C)  | 0.51                     |
| 4" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)             | 9837420   | Socket 2"     | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C)  | 1.26                     |
| 4" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed | 9837421FB | Socket 2-1/2" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C)  | 1.44                     |

|                                                                       |           |               |                                  |                                  |      |
|-----------------------------------------------------------------------|-----------|---------------|----------------------------------|----------------------------------|------|
| 4" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837422   | Socket 3"     | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 0.93 |
| 6" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed     | 9837529FB | Socket 2-1/2" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 3.99 |
| 6" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837530   | Socket 3"     | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 3.48 |
| 6" x 4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837532   | Socket 4"     | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 3.92 |
| 8" x 4" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed, 2 Step | 9837582FB | Socket 4"     | 73 °F (23 °C) at 250 psi (23 °C) | 180 °F (82 °C) at 60 psi (82 °C) | 8.57 |
| 8" x 6" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                 | 9837585   | Socket 6"     | 73 °F (23 °C) at 250 psi (23 °C) | 180 °F (82 °C) at 60 psi (82 °C) | 4.59 |

| Part name                                                                       | Part no.  | Codes                        | Standards                             | Listings             |
|---------------------------------------------------------------------------------|-----------|------------------------------|---------------------------------------|----------------------|
| ChlorFIT Reductor Casquillo                                                     | All       | UPC IBC IRC IPC UMC NSPC IMC | ASTM F439 NSF/ANSI/CAN 61 NSF/ANSI 14 | ULC NSFpw-G U.P.Code |
| In addition, the following parts have additional codes, standards, or listings: |           |                              |                                       |                      |
| 3/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837101   |                              |                                       | ICC-ES-PMG           |
| 1" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                         | 9837130   |                              |                                       | ICC-ES-PMG           |
| 1" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                         | 9837131   |                              |                                       | ICC-ES-PMG           |
| 1-1/4" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                     | 9837166   |                              |                                       | ICC-ES-PMG           |
| 1-1/4" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                     | 9837167   |                              |                                       | ICC-ES-PMG           |
| 1-1/4" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837168   |                              |                                       | ICC-ES-PMG           |
| 1-1/2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                     | 9837209   |                              |                                       | ICC-ES-PMG           |
| 1-1/2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                     | 9837210   |                              |                                       | ICC-ES-PMG           |
| 1-1/2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837211   |                              |                                       | ICC-ES-PMG           |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                   | 9837212   |                              |                                       | ICC-ES-PMG           |
| 2" x 1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                         | 9837247   |                              |                                       | ICC-ES-PMG           |
| 2" x 3/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                         | 9837248   |                              |                                       | ICC-ES-PMG           |
| 2" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837249   |                              |                                       | ICC-ES-PMG           |
| 2" x 1-1/4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837250   |                              |                                       | ICC-ES-PMG           |
| 2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837251   |                              |                                       | ICC-ES-PMG           |
| 2-1/2" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                   | 9837291   |                              |                                       | ICC-ES-PMG           |
| 2-1/2" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837292   |                              |                                       | ICC-ES-PMG           |
| 3" x 1" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837335   |                              |                                       | ICC-ES-PMG           |
| 3" x 1-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837337   |                              |                                       | ICC-ES-PMG           |
| 3" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837338   |                              |                                       | ICC-ES-PMG           |
| 3" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                       | 9837339   |                              |                                       | ICC-ES-PMG           |
| 4" x 2" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837420   |                              |                                       | ICC-ES-PMG           |
| 4" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed               | 9837421FB |                              |                                       | ICC-ES-PMG           |
| 4" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837422   |                              |                                       | ICC-ES-PMG           |
| 6" x 2-1/2" CPVC 80 Reducing Bushing, Flush Style (SpgxS), Bushed               | 9837529FB |                              |                                       | ICC-ES-PMG           |
| 6" x 3" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837530   |                              |                                       | ICC-ES-PMG           |
| 6" x 4" CPVC 80 Reducing Bushing, Flush Style (SpgxS)                           | 9837532   |                              |                                       | ICC-ES-PMG           |

| Installation                                                                                                                                                                                                                                                                                                           | Related applications                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Realice las conexiones mediante soldadura con solvente utilizando imprimación y cemento solvente diseñado específicamente para tuberías y accesorios de CPVC Cédula 80. Consulte el Manual de Uponor ChlorFIT o la Hoja de instrucciones de soldadura con solvente de Uponor ChlorFIT para obtener detalles completos. | Agua doméstica<br>Tuberías hidráulicas |

| Footnotes |  | Contact information    |                         |
|-----------|--|------------------------|-------------------------|
| -         |  | Uponor Inc.            | Uponor Ltd.             |
|           |  | 5925 148th Street West | 6510 Kennedy Road       |
|           |  | Apple Valley, MN 55124 | Mississauga, ON L5T 2X4 |
|           |  | T 800.321.4739         | T 888.594.7726          |
|           |  | F 952.891.2008         | F 800.638.9517          |