

Válvula de bola de transición de latón sin plomo (LF)

ProPEX - Brida



Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
Cold working pressure	250 psi
Temp/pressure ratings	200 °F (93 °C) at 200 psi (13.8 bar)
Prop 65 label required?	Yes

Product information and application use

Estas válvulas de bola de puerto completo con vástagos de acero inoxidable proporcionan un rendimiento confiable y de alto flujo y permiten a los contratistas acelerar las instalaciones en espacios reducidos para una mayor productividad en el lugar de trabajo, al tiempo que ofrecen a los ingenieros oportunidades óptimas de diseño híbrido para cumplir con los requisitos de presión, temperatura y espacio

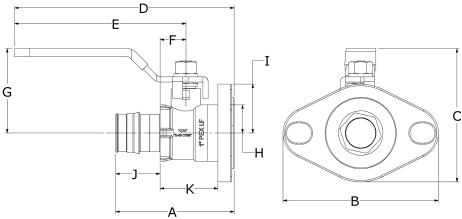

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange	LFT4947575SS	2.598	4.125	3.086	4.555	3.425	0.524	1.791	0.62	1.295	0.945
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Flange	LFT4941010SS	3.146	4.125	3.531	5.827	4.547	0.685	2.236	0.748	1.295	1.181
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange	LFT4941313SS	3.748	4.125	3.691	6.03	4.547	0.821	2.396	0.915	1.295	1.445

Part name	Part no.	K [inch]	Cv	End Type 1	End Type 2	Weight per UOM [lbs/UOM]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange	LFT4947575SS	1.24	14	ProPEX 3/4"	Flange 3/4"	1.02
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Flange	LFT4941010SS	1.335	24.2	ProPEX 1"	Flange 1"	1.45
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange	LFT4941313SS	1.594	40.4	ProPEX 1-1/4"	Flange 1-1/4"	1.89

Part name	Part no.	Codes	Standards	Listings
Válvula de bola de transición de latón sin plomo (LF) ProPEX - Brida	All	UPC IBC IRC IPC NPC of Canada UMC IMC	ASTM F877 NSF/ANSI/CAN 372 NSF/ANSI 359 ASTM F1960 CSA B137.5 NSF/ANSI/CAN 61 NSF/ANSI 14	cNSFus-pw-G U.P.Code

In addition, the following parts have additional codes, standards, or listings:

ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange	LFT4947575SS
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange	LFT4941313SS

Installation

Related applications

Utilice las válvulas de bola de transición de latón ProPEX LF para conexiones roscadas, prensadas y bridas en aplicaciones de tuberías mecánicas y de agua doméstica y HVAC.

-

Footnotes

Contact information

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---