
Colectores de acero inoxidable 'Vario S 1'

Project information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Cv	1.17
Material	Stainless Steel
Manifold size	1 inch
End type 1	FNPT 1"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar) 158 °F (70 °C) at 87 psi (6 bar) 194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	16 gpm
Prop 65 label required?	Yes

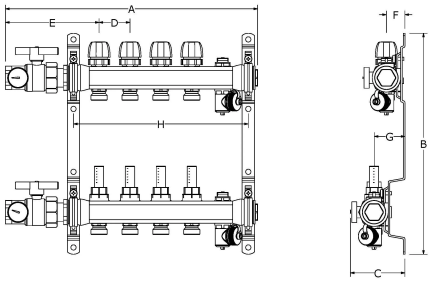

Product information and application use

Los colectores Uponor Vario S de 1" están fabricados con acero inoxidable duradero y resistente a la corrosión, y soportan flujos de hasta 16 galones por minuto (gpm) basados en una caída de presión del colector de 3 psi para aplicaciones de calefacción y refrigeración radiante en residencias y comercios. Los colectores vienen preensamblados y listos para instalar desde el momento en que los sacas de la caja, y cuentan con válvulas de aislamiento, válvulas de equilibrio con medidores de flujo, así como válvulas esféricas de suministro y retorno con rosca NPT de 1" y termómetros.

	Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Subcomponent Material	Weight per UOM [lbs/UOM]
	Vario S 1" Manifold FM, 2 loops	A3700200	11.177	14.055	3.512	1.969	4.976	1.181	1.969	7.299	Manifold Components: Brass	9.2
	Vario S 1" Manifold FM, 3 loops	A3700300	13.153	14.055	3.512	1.969	4.983	1.181	1.969	9.268	Manifold Components: Brass	10.4
	Vario S 1" Manifold FM, 4 loops	A3700400	15.114	14.055	3.512	1.969	4.976	1.181	1.969	11.236	Manifold Components: Brass	11.16
	Vario S 1" Manifold FM, 5 loops	A3700500	17.09	14.055	3.512	1.969	4.983	1.181	1.969	13.205	Manifold Components: Brass	12.2
	Vario S 1" Manifold FM, 6 loops	A3700600	19.058	14.055	3.512	1.969	4.983	1.181	1.969	15.173	Manifold Components: Brass	13.25
	Vario S 1" Manifold FM, 7 loops	A3700700	21.027	14.055	3.512	1.969	4.983	1.181	1.969	17.142	Manifold Components: Brass	12.22
✔	Vario S 1" Manifold FM, 8 loops	A3700800	22.995	14.055	3.512	1.969	4.983	1.181	1.969	19.11	Manifold Components: Brass CW614N-UNI EN12164, CW617N-UNI EN1216	13.12
	Vario S 1" Manifold FM, 10 loops	A3701000	26.932	14.055	3.512	1.969	4.983	1.181	1.969	23.047	Manifold Components: Brass	14.92
	Vario S 1" Manifold FM, 12 loops	A3701200	30.862	14.055	3.512	1.969	4.976	1.181	1.969	26.984	Manifold Components: Brass	16.72

Installation

Consulta la hoja de instrucciones del colector Uponor Vario S de 1" para obtener todos los detalles.

Related applications

Calefacción y refrigeración radiante

Notes

Maximum fluid flow rate of 16 gallons per minute (gpm) based on 3 psi manifold pressure drop.

© 2026 Uponor North America. All Rights Reserved

Footnotes	Contact information	
	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
-		

© 2026 Uponor North America. All Rights Reserved