# Válvula de bola de transición de latón sin plomo (LF) ProPEX - Brida

## Project information


| | |
|---|---|
| Job name: | Location: |
| Engineer: | Fecha de envío: |
| Contractor: | Presentada por: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | LF Brass |
| Cold working pressure | 250 psi |
| Temp/pressure ratings | 200 °F (93 °C) at 200 psi (13.8 bar) |
| Prop 65 label required? | Yes |

## Product information and application use

Estas válvulas de bola de puerto completo con vástagos de acero inoxidable proporcionan un rendimiento confiable y de alto flujo y permiten a los contratistas acelerar las instalaciones en espacios reducidos para una mayor productividad en el lugar de trabajo, al tiempo que ofrecen a los ingenieros oportunidades óptimas de diseño híbrido para cumplir con los requisitos de presión, temperatura y espacio

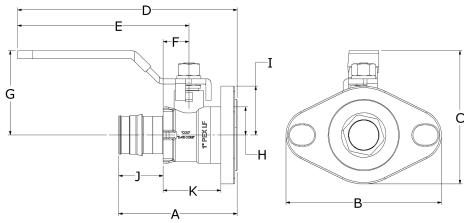


| Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | J [inch] |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange | LFT4947575SS | 2.598 | 4.125 | 3.086 | 4.555 | 3.425 | 0.524 | 1.791 | 0.62 | 1.295 | 0.945 |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Flange | LFT4941010SS | 3.146 | 4.125 | 3.531 | 5.827 | 4.547 | 0.685 | 2.236 | 0.748 | 1.295 | 1.181 |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange | LFT4941313SS | 3.748 | 4.125 | 3.691 | 6.03 | 4.547 | 0.821 | 2.396 | 0.915 | 1.295 | 1.445 |

| Part name | Part no. | K [inch] | Cv | End Type 1 | End Type 2 | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange | LFT4947575SS | 1.24 | 14 | ProPEX 3/4" | Flange 3/4" | 1.02 |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Flange | LFT4941010SS | 1.335 | 24.2 | ProPEX 1" | Flange 1" | 1.45 |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange | LFT4941313SS | 1.594 | 40.4 | ProPEX 1-1/4" | Flange 1-1/4" | 1.89 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| Válvula de bola de transición de latón sin plomo (LF) ProPEX - Brida | All | UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC\|IMC | ASTM F877\|NSF/ANSI/CAN 372\|NSF/ANSI 359\|ASTM F1960\|CSA B137.5\|NSF/ANSI/CAN 61\|NSF/ANSI 14 | cNSFus-pw-G\|U.P.Code |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Flange | LFT4947575SS | | | |
| ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Flange | LFT4941313SS | | | |

## Installation

Utilice las válvulas de bola de transición de latón ProPEX LF para conexiones roscadas, prensadas y bridas en aplicaciones de tuberías mecánicas y de agua doméstica y HVAC.

## Related applications

-

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved