

# Joint à compression mural

## Renseignements sur le projet

Nom du poste :

Lieu :

Ingénieur :

Date de soumission:

Entrepreneur :

Présentée par:

Représentant du fabricant :


Approuvé par :

## Données techniques

Material Rubber  
 Prop 65 label required? Yes

## Informations sur le produit et utilisation de l'application

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

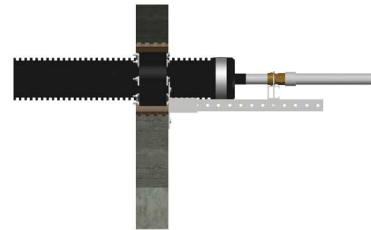

Nom de la pièce	Numéro de pièce	Inner diameter pipe [mm]	Outer diameter pipe [mm]	Weight per UOM [kg/UOM]
Compression Wall Seal for 2.7" Jacket	1007358	70	121	1.179
Compression Wall Seal for 5.5" Jacket	1007360	140	200	2.313
Compression Wall Seal for 6.9" Jacket	1007361	177	248	3.538
Compression Wall Seal for 7.9" Jacket	1007362	202	251	2.767

## L'installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

## Applications connexes

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

## Remarques :

Core Drill OD - 4.75"

Core Drill OD - 8"

Core Drill OD - 10"

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
 5925 148th Street West  
 Apple Valley, MN 55124  
 T 800.321.4739  
 F 952.891.2008

Uponor Ltd.  
 6510 Kennedy Road  
 Mississauga, ON L5T 2X4  
 T 888.594.7726  
 F 800.638.9517