

Joint à compression mural

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Rubber
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

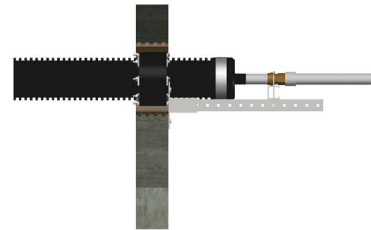

Nom de la pièce	Numéro de pièce	Inner diameter pipe [Inch]	Outer diameter pipe [Inch]	Weight per UOM [lbs/UOM]
Compression Wall Seal for 2.7" Jacket	1007358	2.7559	4.7638	2.6
Compression Wall Seal for 5.5" Jacket	1007360	5.5118	7.874	5.1
Compression Wall Seal for 6.9" Jacket	1007361	6.9685	9.7638	7.8
Compression Wall Seal for 7.9" Jacket	1007362	7.9528	9.8819	6.1

L'installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

Applications connexes

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Les codes

Normes

Annonces

Remarques :

Core Drill OD - 4.75"

Core Drill OD - 8"

Core Drill OD - 10"

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517