


Collecteurs de chauffage en EP

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Engineered Polymer
Subcomponent Material	Manifold: PA66-GF30
	Valve Insert, Handwheels: POM
	Metal Inserts: Brass C38500
	Axel: Stainless Steel
	Spring: Stainless Steel
	O-ring: EPDM
Loop Cv	1.4 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	140 °F (60 °C) at 87 psi (6 bar)
	158 °F (70 °C) at 72 psi (5 bar)
	176 °F (80 °C) at 58 psi (4 bar)
	194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	15.4 gpm
Prop 65 label required?	Yes

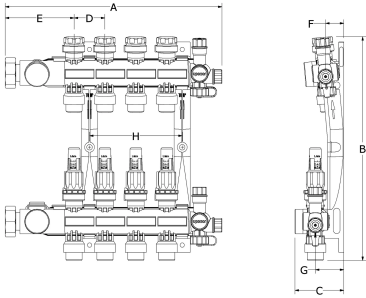

Informations sur le produit et utilisation de l'application

The Engineered Polymer (EP) Heating Manifold Assemblies feature isolation valves and balancing valves with flow meters (0-1 gpm), and come fully assembled, ready for installation in hydronic radiant heating and cooling systems. Use only propylene glycol in radiant systems with EP Heating Manifolds; never use ethylene glycol.

L'installation

Do not use thread sealant on connections. Carriers present in these compounds can crack the plastic port connections, resulting in leaks and water damage. For additional information, refer to the EP Heating Manifold Instruction Sheet. Note: Use only propylene glycol in radiant heating and cooling systems with EP Heating Manifolds; never use ethylene glycol. Refer to the EP Heating Manifold Installation Guide for a complete chemicals list.

Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Remarques :

Compatible Actuators:

A3023522 Thermal Actuator, four-wire; A3030522 Two-wire Thermal Actuator for EP Heating Manifolds

Notes de bas de page

Coordonnées de la personne-ressource

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---