

Valves à bille d'alimentation et de retour du collecteur en acier inoxydable



Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
End type 1	ISO 228-G 1-1/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar) 158 °F (70 °C) at 87 psi (6 bar) 194 °F (90 °C) at 44 psi (3 bar)
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

Uponor Stainless-steel Manifold Supply and Return Ball Valves are R32 male by 1" FNPT or R32 male by 1 1/4" FNPT that fit directly on the Stainless-steel Manifold assemblies. The ball valves come standard with temperature gauges for easy visual check of supply and return temperatures.

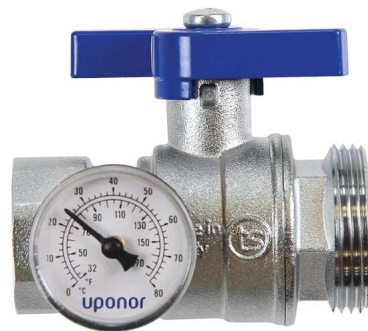

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	Cv	Weight per UOM [lbs/UOM]	End Type 2
Stainless-steel Manifold Supply and Return 1" FNPT Ball Valve with Temperature Gauge, set of 2	A2771251	3.1	2.9	2.825	20	2.32	FNPT 1"
Stainless-steel Manifold Supply and Return 1 1/4" FNPT Ball Valve with Temperature Gauge, set of 2	A2771252	3.451	3.192	2.82	20	3.02	FNPT 1-1/4"

L'installation

Thread the supply ball valve into the supply manifold and the return ball valve into the return manifold by using the supplied gaskets. For further information, refer to the Uponor Stainless-steel Manifold Installation Guide.

Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- AquaSAFE™ Fire Safety Systems

Les codes Normes Annonces

-	-	-
---	---	---

Remarques :

Connection:
R32 MxF

Notes de bas de page

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008
---	---

Coordonnées de la personne-ressource

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517