

Rails en PEX

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material Plastic

Informations sur le produit et utilisation de l'application

Plastic PEX Rail secures Uponor PEX tubing products to metal, concrete and wood support structures. Note: Suitable fastening hardware is required (not included).

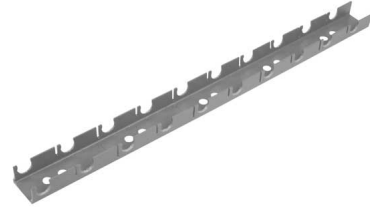

Nom de la pièce	Numéro de pièce	Weight per UOM [lbs/UOM]
1/2" PEX Rail, 6.5 ft.	A5700500	1.1
5/8" PEX Rail, 6.5 ft.	A5700625	1
3/4" PEX Rail, 6.5 ft.	A5700750	1.35

L'installation

Lay out the tube rails parallel with the floor joists (perpendicular to the tubing layout direction). Space the rails 12 inches from the edge of the wall and 36 inches on center thereafter. Fasten the rails to the subfloor using 1" wood screws, liquid nails or silicone. Refer to the Uponor Radiant Installation Handbook for additional information.

Applications connexes

Radiant Heating and Cooling Systems
 Turf Conditioning Systems
 Permafrost Prevention Systems
 Snow and Ice Melt Systems

Les codes	Normes	Annonces
-	-	-

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
 5925 148th Street West
 Apple Valley, MN 55124
 T 800.321.4739
 F 952.891.2008

Uponor Ltd.
 6510 Kennedy Road
 Mississauga, ON L5T 2X4
 T 888.594.7726
 F 800.638.9517