

# Coudes ProPEX en laiton sans plomb (LF) (PEX et PEX)

## Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Material	LF Brass
End type 1	ProPEX 3/4"
End type 2	ProPEX 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Informations sur le produit et utilisation de l'application

Uponor ProPEX® lead-free (LF) brass elbows are available for use in hot and cold domestic potable water systems, hydronic heating systems, all Uponor plumbing systems and in the AquaSAFETM residential fire safety systems. 1 Each end features the ProPEX fitting for connections to Wirsbo hePEXTM tubing or Uponor AquaPEX® tubing. This product is safe for direct burial in soil.

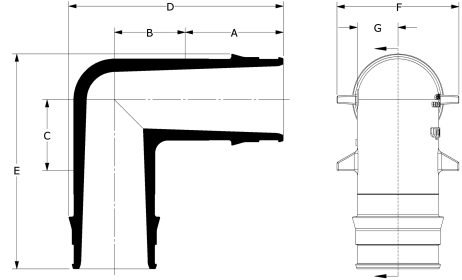

Nom de la pièce	Numéro de pièce	A [Inch]	B [Inch]	C [Inch]	D [Inch]	E [Inch]	F [Inch]	G [Inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Elbow, 3/4" PEX x 3/4" PEX	LF4710750	0.945	0.695	0.4	2.078	1.782	1.2	0.406	0.2

## L'installation

ProPEX tools and ProPEX rings (sold separately) are required for connecting the PEX tubing. Refer to the AquaPEX professional plumbing installation guide, Radiant floor heating installation handbook or the AquaSAFE residential fire sprinkler installation guide for additional information.

## Applications connexes

- PEX-a Plumbing Systems
- Uponor Residential Fire Safety Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Les codes	Normes	Annonces
UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	NSF-372 ASTM F877 ASTM F1960 CSA B137.5 UL 1821 NSF-61 NSF-14	IAPMO-ES cNSFus-pw-fs-G ICC-ES-PMG U.P.Code

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517