
Coudes multivoies à embranchements en EP de type commercial

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Engineered Polymer
End type 2	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

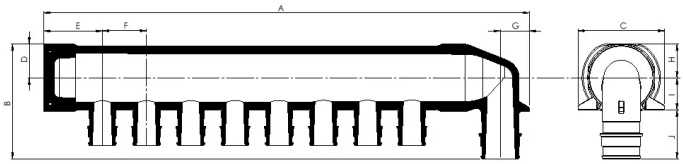

Informations sur le produit et utilisation de l'application

Engineered polymer (EP) branch multi-port elbows feature an integrated $^{3}/_{4}$" or 1" ProPEX® inlet with $^{1}/_{2}$" ProPEX branch outlets. 1 The elbows are designed for commercial plumbing applications to eliminate the need for multiple connections. Product includes EP Mounting Clips (F7051250) with Phillips self-tapping screws.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

	Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
✔	3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips	Q2087550	9.89	2.325	1.768	0.685	1.2	0.9	0.59	0.685	0.65	0.719
	1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips	Q2101000	11.75	2.561	1.768	0.685	1.2	0.9	0.75	0.685	0.65	0.719

	Nom de la pièce	Numéro de pièce	End Type 1	Weight per UOM [lbs/UOM]
✔	3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips	Q2087550	ProPEX 3/4"	0.39
	1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips	Q2101000	ProPEX 1"	0.47

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Coudes multivoies à embranchements en EP de type commercial	All	UPC|IMC|IPC|IBC|IRC|UMC|NSPC|NPC of Canada	ASTM E119/UL 263|ASTM F1960|ASTM E814/ULC S115|CSA B137.5|NSF/ANSI 14|NSF/ANSI/CAN 61|ASTM F877|ULC S102.2|ULC S101	cNSFus-pw|IAPMO-ES|ICC-ES-PMG|cQAIus P321|UL|U.P.Code|HUD MR 1269

L'installation

The mounting clips feature self-tapping screws, which are appropriate for wood or metal studs. Simply attach the clips to the multi-port and fasten the clips to the mounting surface.

Applications connexes

PEX-a Plumbing Systems

Notes de bas de page

-

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor Amérique du Nord. Tous droits réservés