
Coudes multivoies ouverts en EP

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Engineered Polymer
End type 1	ProPEX 3/4"
End type 2	ProPEX 3/4"
End type 3	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

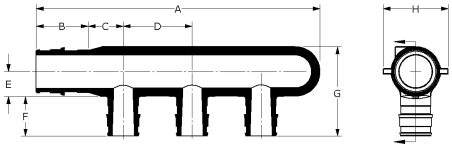

Informations sur le produit et utilisation de l'application

Engineered polymer (EP) flow-through multi-port elbows feature an integrated ¾" ProPEX® elbow with ½" ProPEX branch outlets.1 The elbows are designed for slab-on-grade, potable-plumbing applications to eliminate the need for multiple connections.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

	Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Cv Through
✔	EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2235577	6.17	0.955	0.625	1.25	0.467	0.719	1.87	1.18	7.1
	EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2245577	7.42	0.955	0.625	1.25	0.467	0.719	1.87	1.18	7.1

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Coudes multivoies ouverts en EP	All	UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC	ASTM E814/ULC S115|ASTM F877|ASTM F1960|CSA B137.5|ULC S102.2|ASTM E119/UL 263|ULC S101	IAPMO-ES|HUD MR 1269|ICC-ES-PMG|cNSFus-pw|UL|U.P.Code|cQAIus P321
In addition, the following parts have additional codes, standards, or listings:				
EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2235577		NSF/ANSI/CAN 61|NSF/ANSI 14	
EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2245577		NSF-61|NSF-14	

L'installation

Any product designed to mount 1" copper pipe is suitable for use as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

Applications connexes

PEX-a Plumbing Systems

Notes de bas de page

-

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor Amérique du Nord. Tous droits réservés