Tés multivoies à embranchements en EP

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


Données techniques

Material	Engineered Polymer
End type 2	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

Informations sur le produit et utilisation de l'application

Engineered polymer (EP) branch multi-port tees are used in hot and cold domestic potable water distribution systems. The multi-port tees are available with ¾" or 1" ProPEX® inlets and ½" ProPEX outlets. 1

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

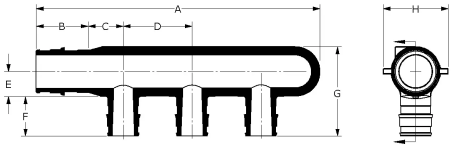

	Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	End Type 1	Prop 65 label required?
✔	3/4" EP Branch Multi-port Tee, 3 (1/2") outlets	Q2237550	4.43	0.955	0.625	1.25	0.48	0.719	1.639	1.22	ProPEX 3/4"	-
	3/4" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2247550	5.73	0.955	0.625	1.25	0.48	0.719	1.639	1.22	ProPEX 3/4"	-
	1" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2241050	6.691	1.191	0.775	1.25	0.6	0.719	1.879	1.48	ProPEX 1"	-
	3/4" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2267550	8.23	0.955	0.625	1.25	0.48	0.719	1.639	1.22	ProPEX 3/4"	No
	1" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2261050	9.251	1.191	0.625	1.25	0.57	0.719	2.009	1.441	ProPEX 1"	-

	Nom de la pièce	Numéro de pièce	Weight per UOM [lbs/UOM]
✔	3/4" EP Branch Multi-port Tee, 3 (1/2") outlets	Q2237550	0.1
	3/4" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2247550	0.13
	1" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2241050	0.17
	3/4" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2267550	0.18
	1" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2261050	0

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Tés multivoies à embranchements en EP	All	UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC	ASTM E814/ULC S115|ASTM F877|ASTM F1960|CSA B137.5|ULC S102.2|ASTM E119/UL 263|NSF/ANSI/CAN 61|ULC S101|NSF/ANSI 14	IAPMO-ES|HUD MR 1269|ICC-ES-PMG|cNSFus-pw|UL|U.P.Code|cQAIus P321

L'installation

For a mounting bracket, use any product designed to mount 1" copper pipe for the ¾" multi-port tee or 1¼" copper pipe for the 1" multi-port tee. For more information, refer to the Uponor Piping Systems Installation Guide.

Applications connexes

PEX-a Plumbing Systems

Notes de bas de page

-

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor Amérique du Nord. Tous droits réservés