
# Tés multivoies à embranchements en EP

## Renseignements sur le projet

| | |
|---|---|
| Nom du poste : | Lieu : |
| Ingénieur : | Date de soumission: |
| Entrepreneur : | Présentée par: |
| Représentant du fabricant : | Approuvé par : |

## Données techniques

| | |
|---|---|
| Material | Engineered Polymer |
| End type 2 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) |
| | 180 °F (82 °C) at 100 psi (6.9 bar) |
| | 200 °F (93 °C) at 80 psi (5.5 bar) |

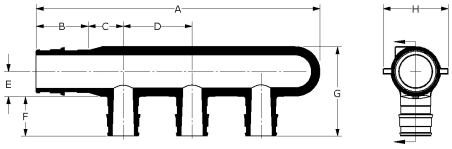


## Informations sur le produit et utilisation de l'application

Engineered polymer (EP) branch multi-port tees are used in hot and cold domestic potable water distribution systems. The multi-port tees are available with ¾" or 1" ProPEX® inlets and ½" ProPEX outlets. 1

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| | Nom de la pièce | Numéro de pièce | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | End Type 1 | Prop 65 label required? |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 3/4" EP Branch Multi-port Tee, 3 (1/2") outlets | Q2237550 | 4.43 | 0.955 | 0.625 | 1.25 | 0.48 | 0.719 | 1.639 | 1.22 | ProPEX 3/4" | - |
| | 3/4" EP Branch Multi-port Tee, 4 (1/2") outlets | Q2247550 | 5.73 | 0.955 | 0.625 | 1.25 | 0.48 | 0.719 | 1.639 | 1.22 | ProPEX 3/4" | - |
| ✔ | 1" EP Branch Multi-port Tee, 4 (1/2") outlets | Q2241050 | 6.691 | 1.191 | 0.775 | 1.25 | 0.6 | 0.719 | 1.879 | 1.48 | ProPEX 1" | - |
| | 3/4" EP Branch Multi-port Tee, 6 (1/2") outlets | Q2267550 | 8.23 | 0.955 | 0.625 | 1.25 | 0.48 | 0.719 | 1.639 | 1.22 | ProPEX 3/4" | No |
| | 1" EP Branch Multi-port Tee, 6 (1/2") outlets | Q2261050 | 9.251 | 1.191 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 | ProPEX 1" | - |

| | Nom de la pièce | Numéro de pièce | Weight per UOM [lbs/UOM] |
|---|---|---|---|
| | 3/4" EP Branch Multi-port Tee, 3 (1/2") outlets | Q2237550 | 0.1 |
| | 3/4" EP Branch Multi-port Tee, 4 (1/2") outlets | Q2247550 | 0.13 |
| ✔ | 1" EP Branch Multi-port Tee, 4 (1/2") outlets | Q2241050 | 0.17 |
| | 3/4" EP Branch Multi-port Tee, 6 (1/2") outlets | Q2267550 | 0.18 |
| | 1" EP Branch Multi-port Tee, 6 (1/2") outlets | Q2261050 | 0 |

| Nom de la pièce | Numéro de pièce | Les codes | Normes | Annonces |
|---|---|---|---|---|
| Tés multivoies à embranchements en EP | All | UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC\|NSPC\|IMC | ASTM E814/ULC S115\|ASTM F877\|ASTM F1960\|CSA B137.5\|ULC S102.2\|ASTM E119/UL 263\|NSF/ANSI/CAN 61\|ULC S101\|NSF/ANSI 14 | IAPMO-ES\|HUD MR 1269\|ICC-ES-PMG\|cNSFus-pw\|UL\|U.P.Code\|cQAIus P321 |

## L'installation

For a mounting bracket, use any product designed to mount 1" copper pipe for the ¾" multi-port tee or 1¼" copper pipe for the 1" multi-port tee. For more information, refer to the Uponor Piping Systems Installation Guide.

## Applications connexes

PEX-a Plumbing Systems

## Notes de bas de page

-

## Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor Amérique du Nord. Tous droits réservés