

# Adaptateurs ProPEX pour coude de collecteur

## Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Informations sur le produit et utilisation de l'application

Uponor ProPEX® Manifold Elbow Adapter threads into Uponor TruFLOW™ and Engineered Polymer (EP) Heating Manifolds to adapt to ProPEX connections in radiant heating and cooling applications.<sup>1</sup>

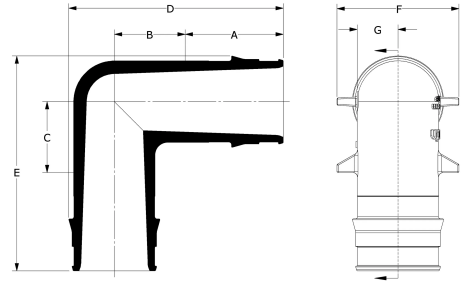

Nom de la pièce	Numéro de pièce	End Type 1	End Type 2	Cv
ProPEX Manifold Elbow Adapter, R32 x 3/4" ProPEX	Q4153275	ProPEX 3/4"	ISO 228-G 1-1/4"	-
ProPEX Manifold Elbow Adapter, R32 x 1" ProPEX	Q4153210	ProPEX 1"	ISO 228-G 1-1/4"	-
ProPEX Manifold Elbow Adapter, R32 x 1 1/4" ProPEX	Q4153213	ProPEX 1-1/4"	ISO 228-G 1-1/4"	-
ProPEX Manifold Elbow Adapter, R32 x 1 1/2" ProPEX	Q4153215	ProPEX 1-1/2"	ISO 228-G 1-1/4"	-
Commercial Stainless-steel Manifold ProPEX Male Elbow Adapter, 1 1/2" PEX x 1 1/2" NPT	A2791515	ProPEX 1-1/2"	MNPT 1-1/2"	29.5

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Adaptateurs ProPEX pour coude de collecteur	All	IMC IRC NBC of Canada UMC	ASTM F1960 ASTM F877	cNSFus-rfh
In addition, the following parts have additional codes, standards, or listings:				
ProPEX Manifold Elbow Adapter, R32 x 3/4" ProPEX	Q4153275		R32: ISO 228-G 1 1/4"	
ProPEX Manifold Elbow Adapter, R32 x 1" ProPEX	Q4153210		R32: ISO 228-G 1 1/4"	
ProPEX Manifold Elbow Adapter, R32 x 1 1/4" ProPEX	Q4153213		R32: ISO 228-G 1 1/4"	
ProPEX Manifold Elbow Adapter, R32 x 1 1/2" ProPEX	Q4153215		R32: ISO 228-G 1 1/4"	
Commercial Stainless-steel Manifold ProPEX Male Elbow Adapter, 1 1/2" PEX x 1 1/2" NPT	A2791515		CSA B137.5 NSF/ANSI 14	ICC-ES-PMG ICC-ES-PMG 1012

## L'installation

R32 threads into the Uponor TruFLOW and EP Heating Manifolds. ProPEX end enables direct, 90-degree contact to Uponor PEX-a tubing. For additional information, refer to the Uponor Radiant Floor Heating Installation Handbook.

## Applications connexes

Radiant Heating and Cooling Systems

## Notes de bas de page

-

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517