
# Coudes pour plinthe ProPEX

## Renseignements sur le projet

| | |
|---|---|
| Nom du poste : | Lieu : |
| Ingénieur : | Date de soumission: |
| Entrepreneur : | Présentée par: |
| Représentant du fabricant : | Approuvé par : |

## Données techniques

| | |
|---|---|
| Material | Brass |
| End type 2 | Sweat 3/4" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes |

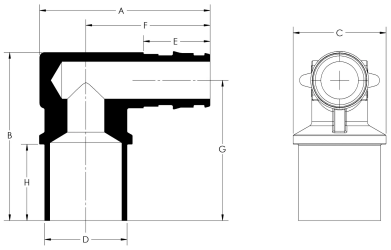


## Informations sur le produit et utilisation de l'application

The Uponor ProPEX® Baseboard Tee Copper Adapter can be used in any heating system applying the use of fin-tube baseboard or unit-type heaters.1 One end of the tee adapter features a ProPEX fitting for an easy transition from copper pipe to Wirsbo hePEXTM tubing or Uponor AquaPEX® tubing.

| | Nom de la pièce | Numéro de pièce | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | End Type 1 | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | ProPEX Baseboard Elbow, 1/2" PEX x 3/4" Copper Adapter | Q4385075 | 1.81 | 1.796 | 0.987 | 0.872 | 0.709 | 1.32 | 1.489 | 0.75 | ProPEX 1/2" | - |
| | ProPEX Baseboard Elbow, 5/8" PEX x 3/4" Copper Adapter | Q4386375 | 1.861 | 0.372 | 1.489 | 0.614 | 0.866 | 1.974 | 1.04 | 0.75 | ProPEX 5/8" | 0.17 |
| | ProPEX Baseboard Elbow, 3/4" PEX x 3/4" Copper Adapter | Q4387575 | 1.924 | 0.435 | 1.489 | 0.615 | 0.945 | 2.054 | 1.2 | 0.75 | ProPEX 3/4" | 0.36 |
| ✔ | ProPEX Baseboard Elbow, 1/2" PEX x 3/4" Copper Fitting Adapter | Q4375075 | 1.81 | 1.796 | 0.987 | 0.869 | 0.709 | 1.32 | 1.489 | 0.81 | ProPEX 1/2" | 0.16 |
| | ProPEX Baseboard Elbow, 5/8" PEX x 3/4" Copper Fitting Adapter | Q4376375 | 2.03 | 1.861 | 1.04 | 0.874 | 0.866 | 1.48 | 1.489 | 0.81 | ProPEX 5/8" | 0.19 |
| | ProPEX Baseboard Elbow, 3/4" PEX x 3/4" Copper Fitting Adapter | Q4377575 | 2.13 | 1.924 | 1.2 | 0.868 | 0.945 | 1.56 | 1.489 | 0.81 | ProPEX 3/4" | - |

| Nom de la pièce | Numéro de pièce | Les codes | Normes | Annonces |
|---|---|---|---|---|
| Coudes pour plinthe ProPEX | All | IMC | ASTM F1960\|CSA B137.5\|ASTM F877 | IAPMO-ES\|ICC-ES-PMG\|cNSFus-rfh |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| ProPEX Baseboard Elbow, 1/2" PEX x 3/4" Copper Adapter | Q4385075 | | NSF/ANSI 14 | |
| ProPEX Baseboard Elbow, 5/8" PEX x 3/4" Copper Adapter | Q4386375 | | NSF-14 | |
| ProPEX Baseboard Elbow, 3/4" PEX x 3/4" Copper Adapter | Q4387575 | | NSF-14 | |
| ProPEX Baseboard Elbow, 1/2" PEX x 3/4" Copper Fitting Adapter | Q4375075 | | NSF/ANSI 14 | |
| ProPEX Baseboard Elbow, 5/8" PEX x 3/4" Copper Fitting Adapter | Q4376375 | | NSF/ANSI 14 | |
| ProPEX Baseboard Elbow, 3/4" PEX x 3/4" Copper Fitting Adapter | Q4377575 | | NSF/ANSI 14 | |

## L'installation

Use the appropriate ProPEX Ring for tubing (sold separately). Do not solder within 18 inches of the ProPEX connection. Refer to the Uponor Radiant Floor Heating Installation Handbook for additional information.

## Applications connexes

Radiant Heating and Cooling Systems

Permafrost Protection Systems

Turf Conditioning Systems

AquaSAFE™ Fire Safety Systems

© 2026 Uponor Amérique du Nord. Tous droits réservés

| Notes de bas de page | Coordonnées de la personne-ressource | |
|---|---|---|
| | Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008 | Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |
| - | | |

© 2026 Uponor Amérique du Nord. Tous droits réservés