

Adaptateurs ProPEX de raccord soudé à l'étain en laiton

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


Données techniques

Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

ProPEX® brass sweat adapters transition Uponor PEX pipe to copper pipe for use in hydronic heating and cooling systems. 1 One end of the adapter is manufactured with the Uponor ProPEX fitting for connection to Wirsbo hePEX™ pipe and the other end is manufactured to adapt copper sweat connections. These adapters are not safe for direct burial in soil. Note: Not for potable use.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

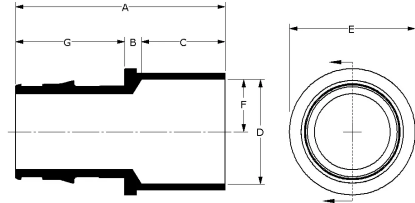

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Cv	Equivalent length through [ft]	Material group
ProPEX LF Brass Sweat Adapter, 3/8" PEX x 1/2" Copper	LF4513850	1.32	0.229	0.5	0.629	0.719	0.315	0.591	5.7	2	LF Brass
ProPEX Brass Sweat Adapter, 1/2" PEX x 1/2" Copper	Q5515050	1.368	0.159	0.5	0.631	0.77	0.315	0.709	5.7	2	Brass
ProPEX LF Brass Sweat Adapter, 1/2" PEX x 3/4" Copper	LF4515075	1.634	0.175	0.75	0.879	0.987	0.439	0.709	5.1	2.7	LF Brass
ProPEX Brass Sweat Adapter, 5/8" PEX x 1/2" Copper	Q4516350	1.491	0.125	0.5	0.629	0.94	0.315	0.866	-	-	Brass
ProPEX Brass Sweat Adapter, 5/8" PEX x 3/4" Copper	Q4516375	1.866	0.25	0.75	0.879	1.04	0.439	0.866	-	-	Brass
ProPEX Brass Sweat Adapter, 3/4" PEX x 1/2" Copper	Q5517550	1.675	0.23	0.5	0.631	1.1	0.315	0.945	8.8	1.4	Brass
ProPEX Brass Sweat Adapter, 3/4" PEX x 3/4" Copper	Q5517575	1.845	0.15	0.75	0.881	1.1	0.441	0.945	13.4	2.1	Brass
ProPEX Brass Sweat Adapter, 3/4" PEX x 1" Copper	Q5517510	2.07	0.215	0.91	1.132	1.26	0.566	0.945	10.9	3.7	Brass
ProPEX Brass Sweat Adapter, 1" PEX x 1" Copper	Q5511010	2.256	0.165	0.91	1.132	1.36	0.566	1.181	22.1	2.4	Brass
ProPEX Brass Sweat Adapter, 1 1/4" PEX x 1 1/4" Copper	Q5511313	2.6	0.185	0.97	1.382	1.72	0.691	1.445	34	3.9	Brass
ProPEX Brass Sweat Adapter, 2" PEX x 2" Copper	Q5512020	3.797	0.31	1.34	2.133	2.68	1.067	2.147	83.6	5.3	Brass
ProPEX LF Brass Sweat Adapter, 3" PEX x 3" Copper	LF4513030	5.33	0.29	1.66	3.13	3.79	1.565	3.38	189.1	8.79	LF Brass
ProPEX Brass Sweat Adapter, 1 1/2" PEX x 1 1/2" Copper	Q5511515	3.049	0.255	1.09	1.633	1.9	0.817	1.704	45.5	4.3	Brass

Nom de la pièce	Numéro de pièce	End Type 1	End Type 2	Weight per UOM [lbs/UOM]
ProPEX LF Brass Sweat Adapter, 3/8" PEX x 1/2" Copper	LF4513850	ProPEX 3/8"	Sweat 1/2"	0.05
ProPEX Brass Sweat Adapter, 1/2" PEX x 1/2" Copper	Q5515050	ProPEX 1/2"	Sweat 1/2"	0.06
ProPEX LF Brass Sweat Adapter, 1/2" PEX x 3/4" Copper	LF4515075	ProPEX 1/2"	Sweat 3/4"	0.09
ProPEX Brass Sweat Adapter, 5/8" PEX x 1/2" Copper	Q4516350	ProPEX 5/8"	Sweat 1/2"	0.11
ProPEX Brass Sweat Adapter, 5/8" PEX x 3/4" Copper	Q4516375	ProPEX 5/8"	Sweat 3/4"	0.16
ProPEX Brass Sweat Adapter, 3/4" PEX x 1/2" Copper	Q5517550	ProPEX 3/4"	Sweat 1/2"	0.1
ProPEX Brass Sweat Adapter, 3/4" PEX x 3/4" Copper	Q5517575	ProPEX 3/4"	Sweat 3/4"	0.15
ProPEX Brass Sweat Adapter, 3/4" PEX x 1" Copper	Q5517510	ProPEX 3/4"	Sweat 1"	0.3
ProPEX Brass Sweat Adapter, 1" PEX x 1" Copper	Q5511010	ProPEX 1"	Sweat 1"	0.31

ProPEX Brass Sweat Adapter, 1 1/4" PEX x 1 1/4" Copper	Q5511313	ProPEX 1-1/4"	Sweat 1-1/4"	0.4
ProPEX Brass Sweat Adapter, 2" PEX x 2" Copper	Q5512020	ProPEX 2"	Sweat 2"	2
ProPEX LF Brass Sweat Adapter, 3" PEX x 3" Copper	LF4513030	ProPEX 3"	Sweat 3"	2.85
ProPEX Brass Sweat Adapter, 1 1/2" PEX x 1 1/2" Copper	Q5511515	ProPEX 1-1/2"	Sweat 1-1/2"	0.65

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Adaptateurs ProPEX de raccord soudé à l'étain en laiton	All	IBC IRC NPC of Canada UMC IMC	ASTM F877 ASTM F1960 CSA B137.5	IAPMO-ES ICC-ES-PMG
In addition, the following parts have additional codes, standards, or listings:				
ProPEX LF Brass Sweat Adapter, 3/8" PEX x 1/2" Copper	LF4513850	UPC IPC NSPC	NSF/ANSI/CAN 372 NSF/ANSI/CAN 61 NSF/ANSI 14	cNSFus-pw-G U.P.Code
ProPEX Brass Sweat Adapter, 1/2" PEX x 1/2" Copper	Q5515050		NSF-14	cNSFus-rfh
ProPEX LF Brass Sweat Adapter, 1/2" PEX x 3/4" Copper	LF4515075	UPC IPC NSPC	NSF/ANSI/CAN 372 NSF/ANSI/CAN 61 NSF/ANSI 14	cNSFus-pw-G U.P.Code
ProPEX Brass Sweat Adapter, 5/8" PEX x 1/2" Copper	Q4516350		NSF/ANSI 14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 5/8" PEX x 3/4" Copper	Q4516375		NSF/ANSI 14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 3/4" PEX x 1/2" Copper	Q5517550		NSF/ANSI 14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 3/4" PEX x 3/4" Copper	Q5517575		NSF/ANSI 14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 3/4" PEX x 1" Copper	Q5517510		NSF-14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 1" PEX x 1" Copper	Q5511010		NSF/ANSI 14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 1 1/4" PEX x 1 1/4" Copper	Q5511313		NSF-14	cNSFus-rfh
ProPEX Brass Sweat Adapter, 2" PEX x 2" Copper	Q5512020		NSF-14	cNSFus-rfh
ProPEX LF Brass Sweat Adapter, 3" PEX x 3" Copper	LF4513030	UPC IPC NSPC	NSF/ANSI/CAN 372 NSF/ANSI/CAN 61 NSF/ANSI 14	cNSFus-pw-G U.P.Code
ProPEX Brass Sweat Adapter, 1 1/2" PEX x 1 1/2" Copper	Q5511515		NSF-14	cNSFus-rfh

L'installation	Applications connexes
Use the appropriate Uponor ProPEX ring for the pipe (sold separately). Do not solder within 18" of the ProPEX fitting. Refer to the Radiant Floor Heating Installation Handbook, Complete Design Assistance Manual (CDAM), or the Hydronic Piping Design Assistance Manual (HPDAM) for additional information.	<ul style="list-style-type: none"> Radiant Heating and Cooling Systems Permafrost Protection Systems Turf Conditioning Systems Hydronic Piping Systems

Notes de bas de page	Coordonnées de la personne-ressource		
-	<table border="0"> <tr> <td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td> <td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		