

Adaptateurs filetés femelles ProPEX en laiton

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

ProPEX® brass female threaded adapters connect Uponor PEX pipe to female NPT threads. 1 Use the adapters in hydronic heating and cooling systems. One end of the adapter is manufactured with the Uponor ProPEX fitting for connection to Wirsbo hePEX™ pipe; the other end is manufactured to adapt a male thread. These adapters are not safe for direct burial in soil. Note: Not for potable use.

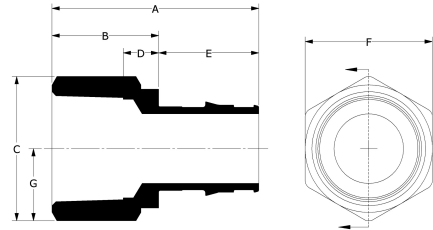

Nom de la pièce	Numéro de pièce	A [Inch]	B [Inch]	C [Inch]	D [Inch]	E [Inch]	F [Inch]	G [Inch]	Cv	Weight per UOM [lbs/UOM]	Equivalent length through [ft]
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	1.906	1.04	1.345	0.486	0.866	1.187	-	-	0.2	-
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	2.381	1.2	1.717	0.52	1.181	1.5	0.858	19.7	0.4	3.8
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	2.57	1.125	2.294	0.415	1.445	2.0	1.147	30.8	0.67	4.8
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	2.854	1.15	2.583	0.42	1.704	2.25	1.291	40.9	1.2	5.1
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	3.547	1.4	3.449	0.703	2.147	3.0	1.724	77.7	2.2	5.7
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	1.569	0.86	1.139	0.326	0.709	1.0	0.57	4.8	0.14	2.5
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	2.145	1.2	1.717	0.52	0.945	1.5	0.858	10.8	0.4	3.6
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	1.845	0.9	1.356	0.347	0.945	1.187	0.678	12	0.2	2.3

Nom de la pièce	Numéro de pièce	End Type 1	End Type 2
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	ProPEX 5/8"	FNPT 3/4"
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	ProPEX 1"	FNPT 1"
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	ProPEX 1-1/4"	FNPT 1-1/4"
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	ProPEX 1-1/2"	FNPT 1-1/2"
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	ProPEX 2"	FNPT 2"
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	ProPEX 1/2"	FNPT 1/2"
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	ProPEX 3/4"	FNPT 1"
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	ProPEX 3/4"	FNPT 3/4"

L'installation

Use the appropriate ProPEX ring for Uponor PEX pipe (sold separately). Refer to the Uponor Radiant Installation Handbook, Complete Design Assistance Manual (CDAM), or Hydronic Piping Design Assistance Manual (HPDAM) for additional information.

Applications connexes

Radiant Heating and Cooling Systems
Permafrost Protection Systems
Turf Conditioning Systems
Hydronic Piping Systems

Les codes

IMC|IBC|IRC|NPC of Canada|UMC

Normes

ASTM F1960|CSA B137.5|NSF-14|ASTM F877

Annonces

IAPMO-ES|ICC-ES-PMG|cNSFus-rfh

Notes de bas de page

-

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517