

# Valves à bille ProPEX en laiton

## Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Cold working pressure	200.2 psi
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Informations sur le produit et utilisation de l'application

Uponor ProPEX® Brass Ball Valve is a cost-effective alternative for radiant heating/cooling and hydronic piping applications. Both ends are manufactured with the ProPEX fitting for connections to Uponor PEX pipe. The full-port valves are compatible with propylene glycol mixtures up to 50%. Stem extensions can be installed to accommodate up to 2" of pipe insulation. Note: ProPEX Brass Ball Valves are not approved for potable-water applications.

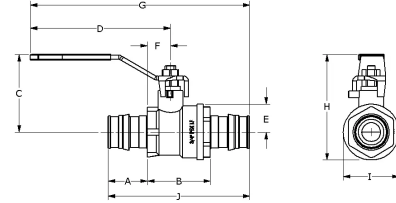

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
ProPEX Brass Ball Valve 1" PEX x 1" PEX	A3201010	1.181	1.808	2.166	4.47	0.79	0.719	6.74	2.956	1.58	4.17
ProPEX Brass Ball Valve 1 1/4" PEX x 1 1/4" PEX	A3201313	1.445	1.91	2.266	4.47	0.905	0.655	7.17	3.206	1.88	4.8
ProPEX Brass Ball Valve 1 1/2" PEX x 1 1/2" PEX	A3201515	1.704	2.292	2.704	5.57	1.095	0.896	8.67	3.799	2.19	5.7
ProPEX Brass Ball Valve 2" PEX x 2" PEX	A3202020	2.147	2.834	3.374	5.57	1.467	1.103	9.448	4.831	2.915	7.128
ProPEX Brass Ball Valve 1/2" PEX x 1/2" PEX	A3205050	0.709	1.083	1.696	3.37	0.49	0.391	4.77	2.186	0.98	2.5
ProPEX Brass Ball Valve 3/4" PEX x 3/4" PEX	A3207575	0.945	1.51	1.868	3.372	0.63	0.555	5.272	2.498	1.26	3.4
2 3/8" Stem Extension Kit for 1/2" and 3/4" Valves	F5630001	-	-	-	-	-	-	-	-	-	-
2 5/8" Stem Extension Kit for 1" and 1 1/4" Valves	F5630002	-	-	-	-	-	-	-	-	-	-
2 5/8" Stem Extension Kit for 1 1/2" and 2" Valves	F5630003	-	-	-	-	-	-	-	-	-	-

Nom de la pièce	Numéro de pièce	Cv	Weight per UOM [lbs/UOM]	Material group	End Type 1	End Type 2	Operating voltage [V]
ProPEX Brass Ball Valve 1" PEX x 1" PEX	A3201010	29	1.3	-	ProPEX 1"	ProPEX 1"	-
ProPEX Brass Ball Valve 1 1/4" PEX x 1 1/4" PEX	A3201313	54.7	1.44	-	ProPEX 1-1/4"	ProPEX 1-1/4"	-
ProPEX Brass Ball Valve 1 1/2" PEX x 1 1/2" PEX	A3201515	68.2	2.12	-	ProPEX 1-1/2"	ProPEX 1-1/2"	-
ProPEX Brass Ball Valve 2" PEX x 2" PEX	A3202020	132.2	4.18	-	ProPEX 2"	ProPEX 2"	-
ProPEX Brass Ball Valve 1/2" PEX x 1/2" PEX	A3205050	7	0.36	-	ProPEX 1/2"	ProPEX 1/2"	30
ProPEX Brass Ball Valve 3/4" PEX x 3/4" PEX	A3207575	18	0.52	-	ProPEX 3/4"	ProPEX 3/4"	-
2 3/8" Stem Extension Kit for 1/2" and 3/4" Valves	F5630001	-	0.31	-	-	-	-
2 5/8" Stem Extension Kit for 1" and 1 1/4" Valves	F5630002	-	0.48	-	-	-	-
2 5/8" Stem Extension Kit for 1 1/2" and 2" Valves	F5630003	-	0.57	-	-	-	-

## L'installation

Install valve according to local building code. Do not dismantle. Refer to the Uponor Hydronic Piping Design Assistance Manual (HPDAM) or the Uponor Radiant Floor Heating Installation Handbook for additional information.

## Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- Hydronic Piping Systems

Les codes	Normes	Annonces
IMC UMC	ASTM F1960 CSA B137.5 NSF-14 ASTM F877 NSF-359	cNSFus-rfh

Notes de bas de page	Coordonnées de la personne-ressource	
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517