# Valves à bille ProPEX en laiton

## Renseignements sur le projet

| | |
|---|---|
| Nom du poste : | Lieu : |
| Ingénieur : | Date de soumission: |
| Entrepreneur : | Présentée par: |
| Représentant du fabricant : | Approuvé par : |

## Données techniques

| | |
|---|---|
| Cv | 132.2 |
| Material | Brass |
| Subcomponent Material | Seal:<br>PTFE |
| End type 1 | ProPEX 2" |
| End type 2 | ProPEX 2" |
| Cold working pressure | 200.2 psi |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes |

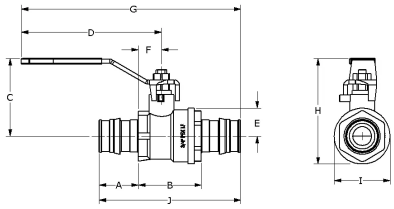


## Informations sur le produit et utilisation de l'application

Uponor ProPEX® Brass Ball Valve is a cost-effective alternative for radiant heating/cooling and hydronic piping applications.1 Both ends are manufactured with the ProPEX fitting for connections to Uponor PEX pipe. The full-port valves are compatible with propylene glycol mixtures up to 50%. Stem extensions can be installed to accommodate up to 2" of pipe insulation. Note: ProPEX Brass Ball Valves are not approved for potable-water applications.

| Nom de la pièce | Numéro de pièce | Les codes | Normes | Annonces |
|---|---|---|---|---|
| Valves à bille ProPEX en laiton | A3202020 | IMC\|UMC | ASTM F1960\|CSA B137.5\|NSF/ANSI 14\|ASTM F877\|NSF/ANSI 359 | cNSFus-rfh |

## L'installation

Install valve according to local building code. Do not dismantle. Refer to the Uponor Hydronic Piping Design Assistance Manual (HPDAM) or the Uponor Radiant Floor Heating Installation Handbook for additional information.

## Applications connexes

Radiant Heating and Cooling Systems

Permafrost Protection Systems

Turf Conditioning Systems

Hydronic Piping Systems

## Notes de bas de page

-

## Coordonnées de la personne-ressource


Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517


© 2024 Uponor Amérique du Nord. Tous droits réservés