

Raccords unions de décalage pour collecteur TruFLOW Classic



Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 1-1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

TruFLOW™ classic manifold offset unions feature an R32 union by 1½" BSP male connection for easy alignment of the supply and return piping at the manifold.

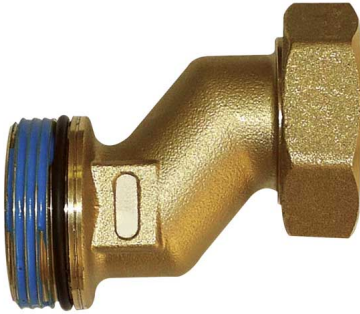

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Raccords unions de décalage pour collecteur TruFLOW Classic	A2620045	-	R32: ISO 228-G 1½"ASTM F877	-

L'installation	Applications connexes
Use the TruFLOW Classic Manifold Offset Union to make the connection between TruFLOW manifolds and R32 manifold adapters. Remove the existing straight union assembly from the manifold to install this offset union. Use silicone oil on the male threads to ease installation. Use only the following Uponor TruFLOW manifold accessories: Replacement O-ring for 1½" BSP Connections (A2620008) and Replacement Gasket for R32 Union Connections (A2620005). For more information, refer to the Uponor TruFLOW Classic Manifold Instruction Sheet.	Radiant Heating and Cooling Systems

Remarques :
Connection: 1½" male BSP x R32

Notes de bas de page	Coordonnées de la personne-ressource
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517