

Adaptateurs filetés femelles ProPEX en laiton

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

ProPEX® brass female threaded adapters connect Uponor PEX pipe to female NPT threads. 1 Use the adapters in hydronic heating and cooling systems. One end of the adapter is manufactured with the Uponor ProPEX fitting for connection to Wirsbo hePEX™ pipe; the other end is manufactured to adapt a male thread. These adapters are not safe for direct burial in soil. Note: Not for potable use.

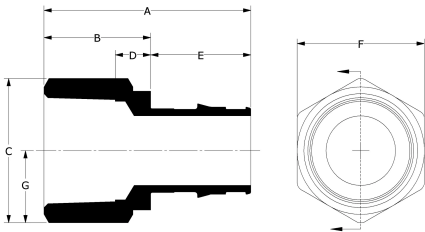

Nom de la pièce	Número de pièce	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	End Type 1	End Type 2	G [mm]	Cv
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	39.85	21.84	28.94	8.28	18	25.40	ProPEX 1/2"	FNPT 1/2"	14.47	4.8
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	48.41	26.42	34.16	12.34	22	30.16	ProPEX 5/8"	FNPT 3/4"	-	-
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	46.86	22.86	34.44	8.81	24	30.16	ProPEX 3/4"	FNPT 3/4"	17.22	12
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	54.48	30.48	43.60	13.21	24	38.10	ProPEX 3/4"	FNPT 1"	21.80	10.8
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	60.48	30.48	43.60	13.21	30	38.10	ProPEX 1"	FNPT 1"	21.80	19.7
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	65.28	28.58	58.27	10.54	36.70	50.80	ProPEX 1-1/4"	FNPT 1-1/4"	29.13	30.8
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	72.49	29.21	65.60	10.67	43.28	57.15	ProPEX 1-1/2"	FNPT 1-1/2"	32.80	40.9
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	90.09	35.56	87.60	17.86	54.53	76.20	ProPEX 2"	FNPT 2"	43.80	77.7

Nom de la pièce	Número de pièce	Weight per UOM [kg/UOM]
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	0.064
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	0.091
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	0.091
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	0.181
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	0.181
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	0.303
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	0.544
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	0.998

Nom de la pièce	Número de pièce	Les codes	Normes	Annonces
Adaptateurs filetés femelles ProPEX en laiton	All	IMC IBC IRC NPC of Canada UMC	ASTM F1960 CSA B137.5 NSF-14 ASTM F877	IAPMO-ES ICC-ES-PMG cNSFus-rfh

L'installation	Applications connexes	
Use the appropriate ProPEX ring for Uponor PEX pipe (sold separately). Refer to the Uponor Radiant Installation Handbook, Complete Design Assistance Manual (CDAM), or Hydronic Piping Design Assistance Manual (HPDAM) for additional information.	Radiant Heating and Cooling Systems	
	Permafrost Protection Systems	
	Turf Conditioning Systems	
	Hydronic Piping Systems	
Notes de bas de page		Coordonnées de la personne-ressource
-		Uponor Inc.
		5925 148th Street West
		Apple Valley, MN 55124
		T 800.321.4739
		F 952.891.2008
		Uponor Ltd.
		6510 Kennedy Road
		Mississauga, ON L5T 2X4
		T 888.594.7726
		F 800.638.9517