

Valves à bille d'alimentation et de retour du collecteur en acier inoxydable




Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Cv	20
Subcomponent Material	Supply Valve: CW617N-UNI EN12165, Return Valve: CW614N-UNI EN 12164
End type 1	ISO 228-G 1-1/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar) 158 °F (70 °C) at 87 psi (6 bar) 194 °F (90 °C) at 44 psi (3 bar)
Prop 65 label required?	Yes

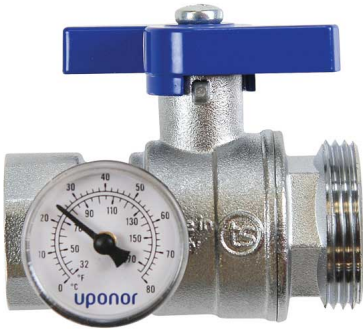

Informations sur le produit et utilisation de l'application

Uponor Stainless-steel Manifold Supply and Return Ball Valves are R32 male by 1" FNPT or R32 male by 1 1/4" FNPT that fit directly on the Stainless-steel Manifold assemblies. The ball valves come standard with temperature gauges for easy visual check of supply and return temperatures.

Nom de la pièce	Numéro de pièce	Material group	End Type 2
Stainless-steel Manifold Supply and Return 1" FNPT Ball Valve with Temperature Gauge, set of 2	A2771251	Brass	FNPT 1"
Stainless-steel Manifold Supply and Return 1 1/4" FNPT Ball Valve with Temperature Gauge, set of 2	A2771252	-	FNPT 1-1/4"

L'installation	Applications connexes
Thread the supply ball valve into the supply manifold and the return ball valve into the return manifold by using the supplied gaskets. For further information, refer to the Uponor Stainless-steel Manifold Installation Guide.	Radiant Heating and Cooling Systems Permafrost Protection Systems Turf Conditioning Systems

Remarques :

Connection:
R32 MxF

Notes de bas de page	Coordonnées de la personne-ressource	
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517