

Ensembles TruFLOW Jr. avec vannes d'équilibrage et d'isolement



Renseignements sur le projet

Nom du poste :

Lieu :

Ingénieur :

Date de soumission:

Entrepreneur :


Présentée par:

Représentant du fabricant :

Approuvé par :

Informations sur le produit et utilisation de l'application

The TruFLOW™ Jr. Assembly with Balancing and Isolation Valves comes fully assembled and ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold to balance the loops across the manifold. The TruFLOW Jr. Manifold with Isolation Valves allows quick isolation of the loop by turning the black cap on the top of the manifold. For multiple zoning on the manifold, remove the black caps and replace with Uponor Thermal Actuators or Motorized Valve Actuators (MVAs). The manifold assembly is shipped with the appropriate number of TruFLOW Manifold Actuator Adapters. The manifold body ends have R32 unions and the loop outlets have R20 male threads.

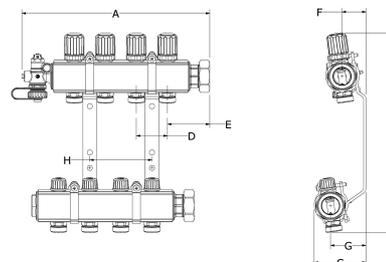

L'installation

TruFLOW Jr. Manifolds are fully assembled ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold. The manifold is shipped with the appropriate number of actuator adapters (A2630028). Refer to the Uponor TruFLOW Jr. Manifold Instruction Sheet for further information.

Applications connexes

Radiant Heating and Cooling Systems
Permafrost Prevention Systems
Turf Conditioning Systems

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517