

Ensembles TruFLOW Jr. avec vannes d'équilibrage et d'isolement

Uponor

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Manifold size	1 inch
Loop Cv	1.9 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Max. fluid flow rate	14 gpm
Prop 65 label required?	Yes

Informations sur le produit et utilisation de l'application

The TruFLOW™ Jr. Assembly with Balancing and Isolation Valves comes fully assembled and ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold to balance the loops across the manifold. The TruFLOW Jr. Manifold with Isolation Valves allows quick isolation of the loop by turning the black cap on the top of the manifold. For multiple zoning on the manifold, remove the black caps and replace with Uponor Thermal Actuators or Motorized Valve Actuators (MVAs). The manifold assembly is shipped with the appropriate number of TruFLOW Manifold Actuator Adapters. The manifold body ends have R32 unions and the loop outlets have R20 male threads.

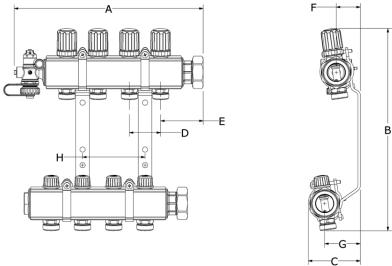

Nom de la pièce	Numéro de pièce	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Weight per UOM [kg/UOM]
TruFLOW Jr. Assembly, B&I, 2-loop	A2660201	182.51	310.24	73.66	50	50.51	32.64	51.14	46.99	2.622
TruFLOW Jr. Assembly, B&I, 3-loop	A2660301	232.51	310.24	73.66	50	50.51	32.64	51.14	50	3.565
TruFLOW Jr. Assembly, B&I, 4-loop	A2660401	282.50	310.24	73.66	50	50.50	32.64	51.14	100	4.513
TruFLOW Jr. Assembly, B&I, 5-loop	A2660501	332.51	310.24	73.66	50	50.51	32.64	51.14	150	5.747
TruFLOW Jr. Assembly, B&I, 6-loop	A2660601	382.51	310.25	73.66	50	50.51	32.65	51.14	200	6.695
TruFLOW Jr. Assembly, B&I, 7-loop	A2660701	432.51	310.24	73.66	50	50.51	32.64	51.14	250	7.639
TruFLOW Jr. Assembly, B&I, 8-loop	A2660801	482.51	310.24	73.66	50	50.51	32.64	51.14	300	8.587

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Ensembles TruFLOW Jr. avec vannes d'équilibrage et d'isolement	All	IMC IRC NBC of Canada UMC	CSA B137.5 R32: ISO 228-G 1¼" ASTM F877 R20: ISO 228-G ¾"	cNSFus-rfh

L'installation	Applications connexes
TruFLOW Jr. Manifolds are fully assembled ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold. The manifold is shipped with the appropriate number of actuator adapters (A2630028). Refer to the Uponor TruFLOW Jr. Manifold Instruction Sheet for further information.	Radiant Heating and Cooling Systems Permafrost Prevention Systems Turf Conditioning Systems

Remarques :
Manifold body threaded connections: R32 Manifold loop threaded connections: R20

Notes de bas de page	Coordonnées de la personne-ressource
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517