

Crochets pour tube

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material Plastic

Informations sur le produit et utilisation de l'application

Tube Talon secures 3/8", 1/2", 5/8", 3/4" and 1" Uponor crosslinked polyethylene (PEX) tubing products. Fasteners are included.

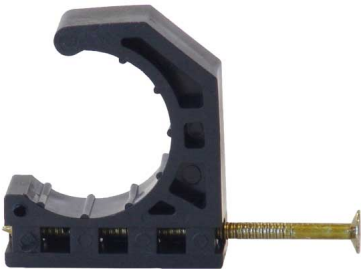

Nom de la pièce	Numéro de pièce	A [mm]	B [mm]	C [mm]	Subcomponent Material	Weight per UOM [kg/UOM]
Tube Talon (3/8" PEX), 100/pkg.	F7050375	40	24.30	9	Polypropylene (PP)	0.004
Tube Talon (1/2", 5/8", 3/4" PEX), 100/pkg.	F7050750	56.31	39.40	10.16	High-density polyethylene (HDPE)	0.004
Tube Talon (1" PEX), 50/pkg.	F7051000	71.27	41.20	13.60	Polypropylene (PP)	0.01

L'installation

Mount the tube talon over the tubing and mounting surface. Attach the tube talon to desired surface with the nail provided. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- PEX-a Plumbing Systems

Notes de bas de page

Coordonnées de la personne-ressource

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---