

Adaptateurs filetés mâles ProPEX en acier inoxydable

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


Données techniques

Material	Stainless Steel
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Informations sur le produit et utilisation de l'application

ProPEX® Stainless Steel Male Threaded Adapters are available for use with reverse osmosis, deionization, and distillation applications producing conditioned water.1 One end of the adapter is manufactured with the Uponor ProPEX Fitting for connections to Wirsbo AQUAPEX® tubing.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

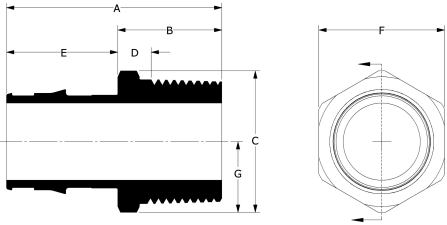

Nom de la pièce	Numéro de pièce	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Cv	End Type 1	End Type 2
ProPEX Stainless-steel Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q8525050	42.41	24.41	25.41	10.85	18	22.23	12.70	5	ProPEX 1/2"	MNPT 1/2"
ProPEX Stainless-steel Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q8527575	48.39	25.65	32.74	11.79	22.73	28.58	16.37	11.3	ProPEX 3/4"	MNPT 3/4"
ProPEX Stainless-steel Male Threaded Adapter, 1" PEX x 1" NPT	Q8521010	58.93	28.93	40.57	11.59	30	35.36	20.29	19.9	ProPEX 1"	MNPT 1"

Nom de la pièce	Numéro de pièce	Weight per UOM [kg/UOM]
ProPEX Stainless-steel Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q8525050	0.236
ProPEX Stainless-steel Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q8527575	0.091
ProPEX Stainless-steel Male Threaded Adapter, 1" PEX x 1" NPT	Q8521010	0.853

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Adaptateurs filetés mâles ProPEX en acier inoxydable	All	UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	ASTM F1960 CSA B137.5	HUD MR 1269 ICC-ES-PMG cNSFus-pw APMO 3558 U.P.Code
In addition, the following parts have additional codes, standards, or listings:				
ProPEX Stainless-steel Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q8525050		NSF-61	
ProPEX Stainless-steel Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q8527575		NSF-61	
ProPEX Stainless-steel Male Threaded Adapter, 1" PEX x 1" NPT	Q8521010		NSF/ANSI/CAN 61	

L'installation	Applications connexes
Use the appropriate ProPEX Ring for the tubing. For more information, refer to the AQUAPEX Professional Plumbing Installation Handbook or Uponor Radiant Floor Installation Handbook.	PEX-a Plumbing Systems

Notes de bas de page	Coordonnées de la personne-ressource
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517