

Coudes ProPEX en EP de 45°

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


Données techniques

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Informations sur le produit et utilisation de l'application

ProPEX® engineered polymer (EP) elbows make 45-degree connections for Uponor crosslinked polyethylene (PEX-a) tubing for use in hot and cold domestic potable water systems, residential fire safety and hydronic radiant heating and cooling systems. Each end of the elbow is manufactured with an Uponor ProPEX fitting for connections to Uponor AquaPEX® or Wirsbo hePEX™ tubing.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

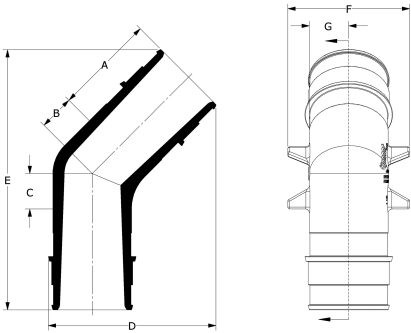

Nom de la pièce	Numéro de pièce	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Cv	End Type 1	End Type 2
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010	30.25	15.24	15.24	55.14	86.52	37.59	12.55	19.1	ProPEX 1"	ProPEX 1"
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313	36.96	15.24	15.24	65.18	100.09	46.23	15.58	29.7	ProPEX 1-1/4"	ProPEX 1-1/4"
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515	43.54	15.24	15.24	72.42	112.21	52.58	17.01	33.1	ProPEX 1-1/2"	ProPEX 1-1/2"
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020	54.79	19.05	19.05	95.68	143.10	71.63	23.89	68.9	ProPEX 2"	ProPEX 2"
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525	71.88	25.40	25.40	122.25	186.77	91.44	30.73	136.8	ProPEX 2-1/2"	ProPEX 2-1/2"
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030	85.85	27.94	27.94	144.27	219.02	106.68	36.83	195.5	ProPEX 3"	ProPEX 3"

Nom de la pièce	Numéro de pièce	Weight per UOM [kg/UOM]
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010	0.028
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313	0.044
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515	0.059
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020	0.145
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525	0.295
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030	0.485

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Coudes ProPEX en EP de 45°	All	IMC UPC IBC IRC IPC NPC of Canada UMC NSPC	ASTM F1960 ASTM E119/UL 263 ASTM E84 ASTM E814/ULC S115 ASTM F877 CSA B137.5 ULC S102.2 ULC S101	IAPMO-ES ICC-ES-PMG cNSFus-pw UL U.P.Code cQAlus P321 HUD MR 1269
In addition, the following parts have additional codes, standards, or listings:				
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030		NSF-61 NSF-14	
L'installation		Applications connexes		
Use the appropriate ProPEX ring for PEX-a tubing. Refer to the Uponor PEX Piping Systems Design and Installation Manual for additional information.		PEX-a Plumbing Systems		
		Hydronic Radiant Heating and Cooling Systems		
		Turf Conditioning Systems		
		Permafrost Prevention Systems		
		AquaSAFE™ Fire Safety Systems		
Notes de bas de page		Coordonnées de la personne-ressource		
-		Uponor Inc.		
		5925 148th Street West		
		Apple Valley, MN 55124		
		T 800.321.4739		
		F 952.891.2008		
		Uponor Ltd.		
		6510 Kennedy Road		
		Mississauga, ON L5T 2X4		
		T 888.594.7726		
		F 800.638.9517		