

Uponor

Build on Uponor with S-Press risers

New extension of S-Press composite portfolio
in dimension of 63-75 PPSU


NEW



S-Press portfolio extension in dimension 63-75

Build to make your riser installation fast and reliable under attractive terms

- ✓ S-Press 63-75 material is listed on the 4MS positive list as approved **lead-free** material to be in contact with water for human consumption
- ✓ Fast installation with easy bevelling and without calibration
- ✓ Compatibility to current pipes and tools
- ✓ Free choice between Uponor RS portfolio and S-Press composite portfolio 63-75
- ✓ Colour coding
- ✓ Test safety function
- ✓ Stop ring segments for easy and precise jaw fixation

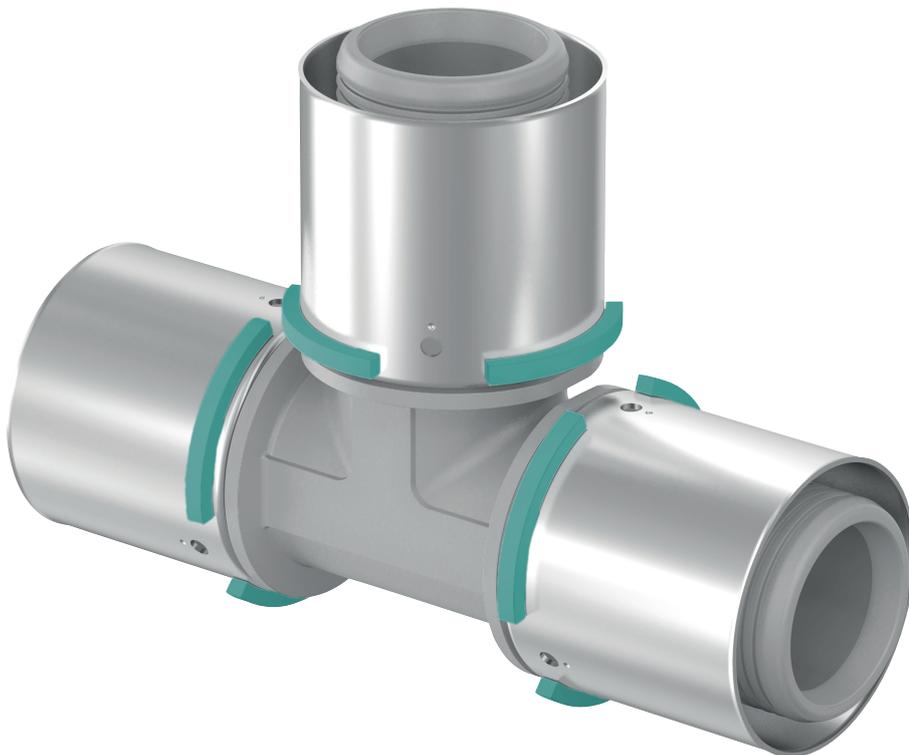

Fields of application

The Uponor S-Press fitting 40-75 is applicable for all sanitary facilities as well as for heating and cooling, e.g. for house construction and for public and commercial buildings.

Together with the Uponor MLC it has system approvals all over Europe for drinking water incl. hygiene approvals. S-Press 40-75 is also applicable for heating and cooling.

Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor S-Press composite 40-75 portfolio



UPONOR S-PRESS COMPOSITE ELBOW

Items	Description	material
1046386	PPSU 40-40	PPSU
1046387	PPSU 50-50	PPSU
1032877	PPSU 63-63	PPSU
1032878	PPSU 75-75	PPSU



UPONOR S-PRESS COMPOSITE TEE

Items	Description	material
1046390	PPSU 40-40-40	PPSU
1046391	PPSU 50-50-50	PPSU
1032887	PPSU 63-63-63	PPSU
1032888	PPSU 75-75-75	PPSU




UPONOR S-PRESS COMPOSITE ELBOW 45°

Items	Description	material
1046388	PPSU 40-40	PPSU
1046389	PPSU 50-50	PPSU
1032879	PPSU 63-63	PPSU
1032880	PPSU 75-75	PPSU



UPONOR S-PRESS COMPOSITE TEE REDUCER

Items	Description	material
1046392	PPSU 40-20-40	PPSU
1046393	PPSU 40-25-32	PPSU
1046394	PPSU 40-25-40	PPSU
1046395	PPSU 40-32-32	PPSU
1046396	PPSU 40-32-40	PPSU
1046397	PPSU 50-25-40	PPSU
1046398	PPSU 50-25-50	PPSU
1046399	PPSU 50-32-50	PPSU
1046400	PPSU 50-40-50	PPSU
1032889	PPSU 63-25-63	PPSU
1032890	PPSU 63-32-63	PPSU
1032891	PPSU 63-40-63	PPSU
1032892	PPSU 75-32-75	PPSU
1032893	PPSU 75-40-75	PPSU
1032894	PPSU 75-50-75	PPSU



UPONOR S-PRESS COMPOSITE COUPLING

Items	Description	material
1046401	PPSU 40-40	PPSU
1046402	PPSU 50-50	PPSU
1032881	PPSU 63-63	PPSU
1032882	PPSU 75-75	PPSU



UPONOR S-PRESS COMPOSITE REDUCER

Items	Description	material
1046403	PPSU 40-25	PPSU
1046404	PPSU 40-32	PPSU
1046405	PPSU 50-32	PPSU
1046406	PPSU 50-40	PPSU
1032883	PPSU 63-40	PPSU
1032884	PPSU 63-50	PPSU
1032885	PPSU 75-50	PPSU
1032886	PPSU 75-63	PPSU



UPONOR S-PRESS ADAPTER MALE THREAD

Items	Description	material
1046901	40-R1 1/4"MT	Brass
1046902	40-R1 1/2"MT	Brass
1046905	50-R1 1/2"MT	Brass
1046906	50-R2"MT	Brass
1032895	63-R2"MT	Brass
1032896	75-R2 1/2"MT	Brass

Uponor

Uponor Corporation
Äyritie 20
01510 Vantaa
Finland

T +358 20 129 211
F +358 20 129 2841

1095114_022019



www.uponor.com