


Uponor Uni-C manifold male female thread S 1"MT/FT 2x1/2"MT

1014107

- Made of tin-plated brass
- with connection 1" for male thread or female thread, outlets 1/2" male thread fits to Uponor compression adapter.

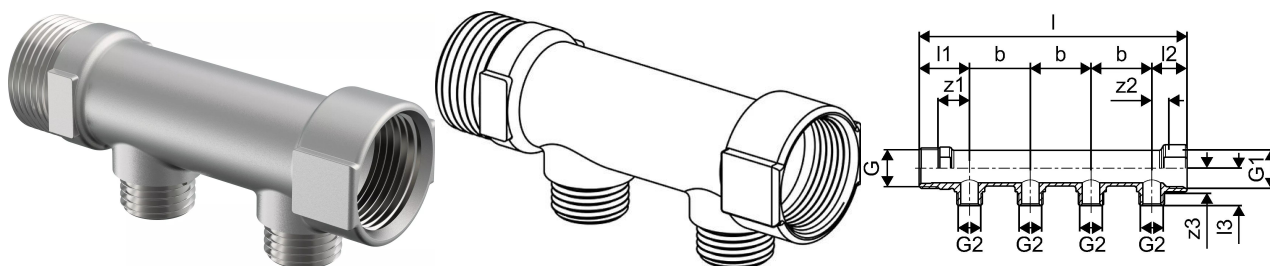

Application information Uponor Uni-C manifold male female thread S

Specification


- Modular brass manifold system with male threaded connections
- Components made of tin-plated or plated brass; brackets in galvanised steel
- Compatible with 1/2" Uni-C compression adapters for MLC and Uni Pipe PLUS pipes
- Thread standards according to EN ISO 228-1 / DIN
- System includes manifolds, valves, end caps, plugs, brackets, couplings, and adapters

Application

- Distribution and connection of tap water
- Manifold-based installations with male threaded connections
- Adaptation between Uponor pipe systems (Uni Pipe PLUS, MLC) and Uponor 1/2" threaded components
- Use in residential and light commercial installations
- Flexible system extension via manifolds, adapters, and accessories

Uponor Uni-C manifold male female thread S 1"MT/FT 2x1/2"MT

1014107

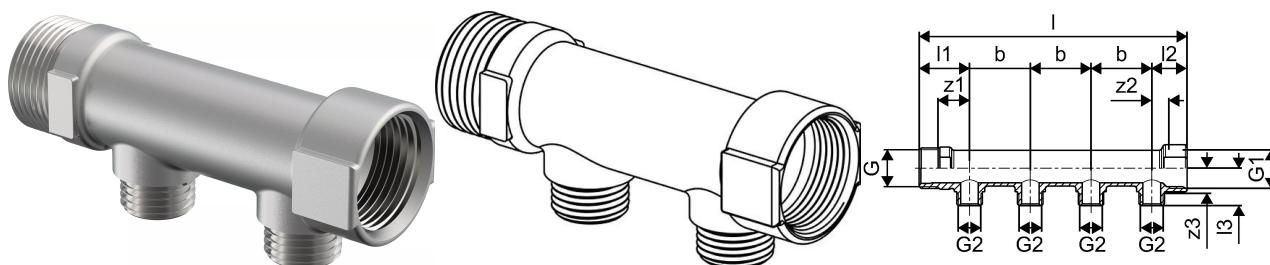

Measurements

Cylindric_thread_G	1
Cylindric_thread_G1	1
Cylindric thread G2	1/2
LENGTH_L	120,5
Length (l1)	41,5
Length (l2)	29
Length (l3)	30,7
Z Measurement b	50
z1	26
Z2	14
Z3	20,8

Product code

Item no EAN	4021598701083
Item no GF	35001014107
Item no GTIN	04021598701083
Item no VVS	045466002

Dimensions

Item Unit Height	33
Item Unit Length	120
Item Unit Weight	0,36
Item Unit Width	45
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905258673
Packaging GTIN PL4	06414905258697
Packaging Height PL1	40
Packaging Height PL4	540

Packaging Length PL1	125
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	1218
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00025
Packaging Volume PL4	0,5184
Packaging Weight PL1	0,38
Packaging Weight PL4	462,84
Packaging Width PL1	50
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com