
Product data sheet



GF Uponor Ecoflex VIP Thermo Pipe Twin 2X75X6,8/250

1160615

- Heating and Cooling
- Two medium pipes PE-Xa wih oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing

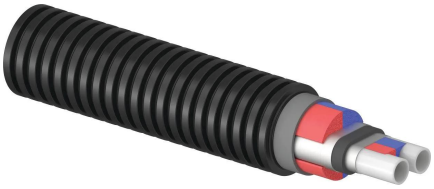

Application information GF Uponor Ecoflex VIP Thermo Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

GF Uponor Ecoflex VIP Thermo Pipe Twin 2X75X6,8/250

1160615

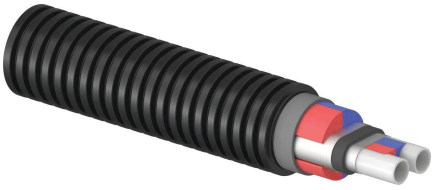

Measurements

Bending radius M	1,4
Outer Diameter_do	250
Outer Diameter_do1	75
Outer Diameter_do2	75
Wall thickness_s1	6,8
Wall thickness_s2	6,8

Status

Item Available From date	2026-06-01

Product code

Item no EAN	6414900506427
Item no GF	35001160615
Item no GTIN	06414900506427
Item no LVI	3010180
Item no NRF	1475902
Item no RSK	2523141

Dimensions

Item Unit Height	250
Item Unit Length	1000
Item Unit Weight	6,74
Item Unit Width	250
Item_UOM	m

Packaging

Packaging GTIN PL1	06414900448710
Packaging Height PL1	2450
Packaging Length PL1	2450
Packaging Quantity PL1	100

Packaging Type PL1	Coil
Packaging Volume PL1	10,8045
Packaging Weight PL1	676
Packaging Width PL1	1800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+