


## Uponor S-Press tee reducer 50-25-40

**1046924**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

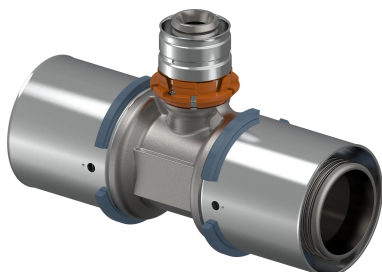

### About Uponor S-Press tee reducer

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press tee reducer 50-25-40

1046924



### Status

Item Available Till date 2026-12-31T00:00:00.000+0100

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

### Product code

Item no EAN 4021598114210

Item no GF 35001046924

Item no GTIN 04021598114210

Item no VVS 045476436

### Dimensions

Item Unit Height 44

Item Unit Length 122

Item Unit Weight 0,615

Item Unit Width 93

Item\_UOM pce

### Measurements

Length (l1) 61

Length (l2) 65

Length (l3) 61

z1 23,1

Z2 34,7

Z3 23,1

### Packaging

Packaging GTIN PL1 06414905460656

Packaging GTIN PL4 06414905555345

Packaging Height PL1 105

Packaging Height PL4 645

Packaging Length PL1 176

Packaging Length PL4 800

Packaging Quantity PL1	3
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	1,906
Packaging Weight PL4	210,6
Packaging Width PL1	202
Packaging Width PL4	1200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)