


## Uponor Ecoflex VIP Aqua Twin 25x3,5-20x2,8/140

### 1119053

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- Coloured centre profile to identify flow and return lines
- VIP + PEX foam, HDPE casing

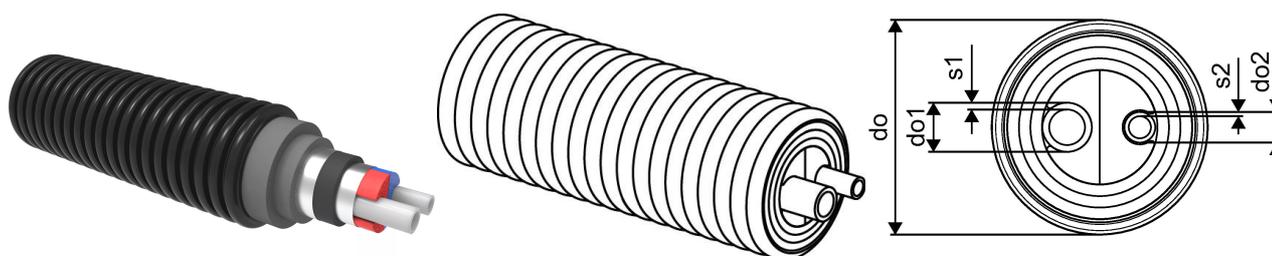

## About Uponor Ecoflex VIP Aqua Twin

### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

### Application

- Buried installations for the transport of warm tap water
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex VIP Aqua Twin 25x3,5-20x2,8/140

1119053

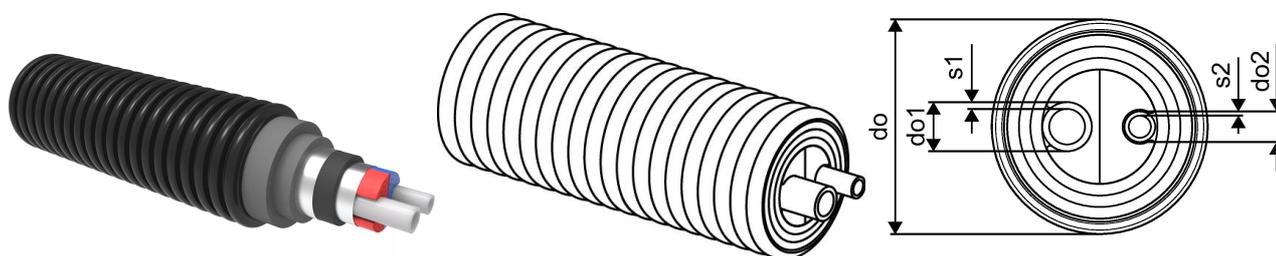

### Measurements

Bending radius M	0,65
Outer Diameter_do	140
Outer Diameter_do1	25
Outer Diameter_do2	20
Wall thickness_s1	3,5
Wall thickness_s2	2,8

### Product code

Item no EAN	6414905556359
Item no GF	35001119053
Item no GTIN	06414905556359
Item no LVI	3010299
Item no NRF	8360971
Item no RSK	2266379
Item no VVS	087364225

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,74
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905556496
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26

Packaging Weight PL1	348,1
Packaging Width PL1	1500

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)