


## GF Malleable Fittings cap 300 2 G

**1154199**

- Cap, ISO/EN T1
- 'ST' these types of fittings are made from steel (galvanised finish = electroplated)
- Not suitable for drinking water installations.

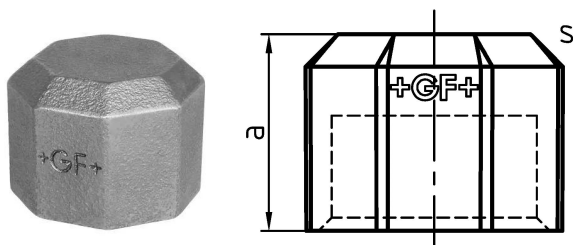

### About GF Malleable Fittings cap 300

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings cap 300 2 G

1154199



### Product code

Item no EAN	7611205430740
Item no GF	770300209
Item no GTIN	07611205430740
Item no LVI	0855202
Item no NOBB	60639219
Item no NRF	1366951
Item no RSK	1329168
Item no VVS	004300412

### Dimensions

Item Unit Height	68
Item Unit Length	73
Item Unit Weight	0,411
Item Unit Width	39
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205230746
Packaging GTIN PL4	06414900241847
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	30
Packaging Quantity PL4	1620
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984

Packaging Weight PL1	12,544
Packaging Weight PL4	685,82
Packaging Width PL1	190
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)