Product data sheet





GF Malleable Fittings 596 - plug, hexagon/square inside, black 1 1/4

1154803

- Plug, hexagon/square inside, ISO/EN T11

- ST ... these types of fittings are made from steel (galvanised finish = electroplated)
- and not suitable for drinking water installations.

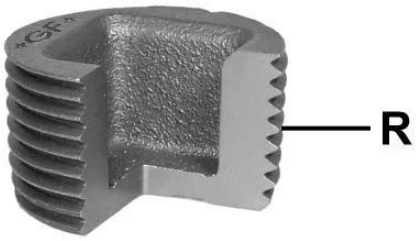



About GF Malleable Fittings 596 - plug, hexagon/square inside, black

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5
to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT)
acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment
Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees,
between 120-300 degrees use interpolated values,
Max. 20bar at 300 degrees
- Sizes from ¼" to 4"


Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 596 - plug, hexagon/square inside, black 1 1/4

1154803

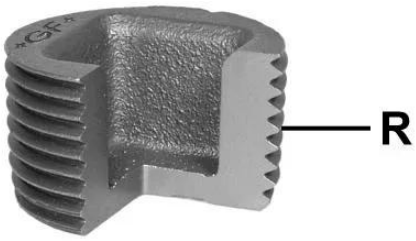



Product code

Item no EAN	7611205359362
Item no GF	770596107
Item no GTIN	07611205359362
Item no RSK	1254139
Item no VVS	004296110

Dimensions

Item Unit Height	43
Item Unit Length	43
Item Unit Weight	0,143
Item Unit Width	22
Item_UOM	pce

Measurements

Male_thread_R	1 1/4
Z Measurement d	22
Z MEASUREMENT S	22

Packaging

Packaging GTIN PL1	07611205159368
Packaging GTIN PL4	06414900071444
Packaging Height PL1	100
Packaging Height PL4	508
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	60
Packaging Quantity PL4	4320
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	8,7
Packaging Weight PL4	637,76
Packaging Width PL1	190
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+