# ProPEX EP reducing tees - up to 1.5in

## Project information


| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

## Technical data

Temp/pressure ratings
73 °F (23 °C) at 160 psi (11 bar)
180 °F (82 °C) at 100 psi (6.9 bar)
200 °F (93 °C) at 80 psi (5.5 bar)

## Product information and application use

ProPEX® engineered polymer (EP) reducing tees make diverting connections for Uponor crosslinked polyethylene (PEX-a) tubing for use in hot and cold domestic potable water systems, residential fire sprinkler systems and hydronic radiant heating and cooling systems. Each end of the tee is manufactured with an Uponor ProPEX fitting for connections to Uponor AquaPEX® or Wirsbo hePEX™ tubing. Note: Branch size is listed last in the part descriptions.

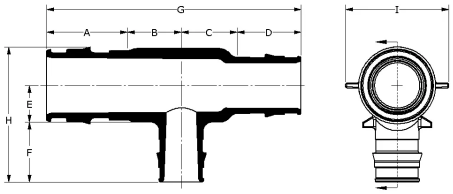


Related: ProPEX EP reducing tees - 2in and up

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | Cv Through |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ProPEX EP Reducing Tee, 1/2" PEX x 1/2" PEX x 3/4" PEX | Q4755575 | 0.719 | 0.71 | 0.71 | 0.719 | 0.5 | 0.955 | 2.858 | 1.765 | 0.87 | 7.7 |
| ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 1/2" PEX | Q4757555 | 0.955 | 0.7 | 0.7 | 0.719 | 0.52 | 0.719 | 3.074 | 1.676 | 1.22 | 4.6 |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1/2" PEX | Q4757550 | 0.955 | 0.69 | 0.69 | 0.955 | 0.54 | 0.719 | 3.29 | 1.696 | 1.22 | 14.2 |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 5/8" PEX | Q4757563 | 0.955 | 0.69 | 0.69 | 0.955 | 0.54 | 0.876 | 3.29 | 1.856 | 1.18 | 15.7 |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1" PEX | Q4757710 | 0.955 | 0.865 | 0.865 | 0.955 | 0.69 | 1.191 | 3.64 | 1.881 | 1.18 | 15.7 |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 3/4" PEX | Q4751775 | 1.191 | 0.775 | 0.775 | 0.955 | 0.65 | 0.955 | 3.696 | 2.195 | 1.48 | 12.8 |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1" PEX | Q4751751 | 1.191 | 0.925 | 0.925 | 0.955 | 0.65 | 1.191 | 3.996 | 2.431 | 1.48 | 12.9 |
| ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1/2" PEX | Q4751150 | 1.191 | 0.7 | 0.7 | 1.191 | 0.65 | 0.719 | 3.782 | 1.959 | 1.48 | 32.2 |
| ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 3/4" PEX | Q4751175 | 1.191 | 0.85 | 0.85 | 1.191 | 0.65 | 0.955 | 4.082 | 2.195 | 1.48 | 27.8 |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 3/4" PEX | Q4751317 | 1.455 | 0.925 | 0.925 | 1.191 | 0.75 | 0.955 | 4.496 | 2.386 | 1.82 | 21 |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 1" PEX | Q4751311 | 1.455 | 1.03 | 1.03 | 1.191 | 0.75 | 1.191 | 4.706 | 2.622 | 1.82 | 11.7 |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1/2" PEX | Q4751350 | 1.455 | 0.75 | 0.75 | 1.455 | 0.83 | 0.719 | 4.41 | 2.199 | 1.82 | 45.2 |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 3/4" PEX | Q4751337 | 1.455 | 0.9 | 0.9 | 1.455 | 0.75 | 0.955 | 4.71 | 2.386 | 1.82 | 43.4 |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1" PEX | Q4751331 | 1.455 | 1.03 | 1.03 | 1.455 | 0.75 | 1.191 | 4.97 | 2.622 | 1.82 | 33 |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 3/4" PEX | Q4751517 | 1.714 | 1.1 | 1.1 | 1.191 | 0.9 | 0.955 | 5.105 | 2.602 | 2.07 | 19.5 |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1" PEX | Q4751511 | 1.714 | 1.1 | 1.1 | 1.191 | 0.9 | 1.191 | 5.105 | 2.839 | 2.07 | 18.9 |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1 1/2" PEX | Q4751505 | 1.714 | 1.25 | 1.25 | 1.191 | 0.94 | 1.714 | 5.405 | 3.434 | 2.07 | 19 |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 3/4" PEX | Q4751537 | 1.714 | 0.9 | 0.9 | 1.455 | 0.85 | 0.955 | 4.969 | 2.552 | 2.07 | 33.1 |

© 2026 Uponor North America. All Rights Reserved

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1" PEX | Q4751531 | 1.714 | 1.05 | 1.05 | 1.455 | 0.85 | 1.191 | 5.269 | 2.789 | 2.07 | 36.4 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1 1/4" PEX | Q4751533 | 1.714 | 1.15 | 1.15 | 1.455 | 0.85 | 1.455 | 5.469 | 3.052 | 2.07 | 45.4 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1/2" PEX | Q4751550 | 1.714 | 0.75 | 0.75 | 1.714 | 0.83 | 0.719 | 4.928 | 2.299 | 2.07 | 60.5 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 3/4" PEX | Q4751557 | 1.714 | 0.925 | 0.925 | 1.714 | 0.85 | 0.955 | 5.278 | 2.555 | 2.07 | 56 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1" PEX | Q4751551 | 1.714 | 1 | 1 | 1.714 | 0.85 | 1.191 | 5.428 | 2.791 | 2.07 | 53.8 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1 1/4" PEX | Q4751553 | 1.714 | 1.15 | 1.15 | 1.714 | 0.85 | 1.455 | 5.728 | 3.055 | 2.07 | 54.3 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 3/4" PEX | Q4757557 | 0.955 | 0.7 | 0.7 | 0.719 | 0.52 | 0.955 | 3.074 | 1.913 | 1.22 | 5.4 |
| | ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1 1/4" PEX | Q4751113 | 1.191 | 1 | 1 | 1.191 | 0.9 | 1.455 | 4.382 | 2.945 | 1.82 | 15 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1" PEX | Q4751371 | 1.455 | 1.06 | 0.9 | 0.955 | 0.75 | 1.191 | 4.37 | 2.622 | 1.82 | 13.9 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1 1/4" PEX | Q4751373 | 1.455 | 1.2 | 1 | 0.955 | 0.75 | 1.455 | 4.61 | 2.886 | 1.82 | 18.8 |
| ✔ | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 3/4" PEX | Q4751377 | 1.455 | 0.9 | 0.8 | 0.955 | 0.75 | 0.955 | 4.11 | 2.386 | 1.82 | 7.3 |
| | ProPEX EP Reducing Tee, 1" PEX x 1/2" PEX x 1" PEX | Q4751501 | 1.191 | 1 | 0.8 | 0.719 | 0.65 | 1.191 | 3.71 | 2.431 | 1.48 | 12.3 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 1 1/2" PEX | Q4751575 | 1.714 | 1.3 | 1 | 0.955 | 0.9 | 1.714 | 4.969 | 3.394 | 2.07 | 22.9 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 3/4" PEX | Q4751577 | 1.714 | 0.9 | 0.8 | 0.955 | 0.9 | 0.955 | 4.369 | 2.635 | 2.07 | 7.3 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1/2" PEX | Q4751750 | 1.191 | 0.75 | 0.75 | 0.955 | 0.65 | 0.719 | 3.646 | 1.959 | 1.48 | 3.1 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1 1/4" PEX | Q4751753 | 1.191 | 1 | 1 | 0.955 | 0.9 | 1.455 | 4.146 | 2.945 | 1.82 | 14.7 |

| | Part name | Part no. | Equivalent length branch [ft] | Equivalent length through [ft] | Material group | Cv Branch | End Type 1 | End Type 2 | End Type 3 | Prop 65 label required? | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | ProPEX EP Reducing Tee, 1/2" PEX x 1/2" PEX x 3/4" PEX | Q4755575 | 15.6 | 1 | Engineered Polymer | 5.4 | ProPEX 1/2" | ProPEX 1/2" | ProPEX 3/4" | - | 0.03 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 1/2" PEX | Q4757555 | 6.4 | 3.5 | Engineered Polymer | 3.4 | ProPEX 3/4" | ProPEX 1/2" | ProPEX 1/2" | - | 0.04 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1/2" PEX | Q4757550 | 7.6 | 2 | Engineered Polymer | 3.1 | ProPEX 3/4" | ProPEX 3/4" | ProPEX 1/2" | - | 0.04 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 5/8" PEX | Q4757563 | 15.6 | 1.5 | Engineered Polymer | 5.4 | ProPEX 3/4" | ProPEX 3/4" | ProPEX 5/8" | - | 0.05 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1" PEX | Q4757710 | 5.76 | 1.5 | Engineered Polymer | 8.7 | ProPEX 3/4" | ProPEX 3/4" | ProPEX 1" | - | 0.08 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 3/4" PEX | Q4751775 | 16.7 | 2.4 | Engineered Polymer | 5.3 | ProPEX 1" | ProPEX 3/4" | ProPEX 3/4" | - | 0.08 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1" PEX | Q4751751 | 15.1 | 2.4 | Engineered Polymer | 10.5 | ProPEX 1" | ProPEX 3/4" | ProPEX 1" | - | 0.08 |
| | ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1/2" PEX | Q4751150 | 6.5 | 1.2 | Engineered Polymer | 3.4 | ProPEX 1" | ProPEX 1" | ProPEX 1/2" | - | 0.08 |
| | ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 3/4" PEX | Q4751175 | 6.4 | 1.7 | Engineered Polymer | 8.2 | ProPEX 1" | ProPEX 1" | ProPEX 3/4" | - | 0.09 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 3/4" PEX | Q4751317 | 5.2 | 3.4 | Engineered Polymer | 9.3 | ProPEX 1-1/4" | ProPEX 1" | ProPEX 3/4" | - | 0.11 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 1" PEX | Q4751311 | 23 | 11 | Engineered Polymer | 8.4 | ProPEX 1-1/4" | ProPEX 1" | ProPEX 1" | - | 0.12 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1/2" PEX | Q4751350 | 3.9 | 1.9 | Engineered Polymer | 4.1 | ProPEX 1-1/4" | ProPEX 1-1/4" | ProPEX 1/2" | - | 0.1 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 3/4" PEX | Q4751337 | 5.7 | 2.3 | Engineered Polymer | 8.9 | ProPEX 1-1/4" | ProPEX 1-1/4" | ProPEX 3/4" | - | 0.13 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1" PEX | Q4751331 | 6.3 | 4.2 | Engineered Polymer | 15.8 | ProPEX 1-1/4" | ProPEX 1-1/4" | ProPEX 1" | No | 0.14 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 3/4" PEX | Q4751517 | 5.1 | 4 | Engineered Polymer | 9.3 | ProPEX 1-1/2" | ProPEX 1" | ProPEX 3/4" | - | 0.17 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1" PEX | Q4751511 | 6.5 | 4.3 | Engineered Polymer | 15.6 | ProPEX 1-1/2" | ProPEX 1" | ProPEX 1" | - | 0.18 |

© 2026 Uponor North America. All Rights Reserved

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1 1/2" PEX | Q4751505 | 14.9 | 4.2 | Engineered Polymer | 26.5 | ProPEX 1-1/2" | ProPEX 1" | ProPEX 1-1/2" | - | 0.2 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 3/4" PEX | Q4751537 | 11.3 | 4.2 | Engineered Polymer | 6.3 | ProPEX 1-1/2" | ProPEX 1-1/4" | ProPEX 3/4" | No | 0.18 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1" PEX | Q4751531 | 13.1 | 3.1 | Engineered Polymer | 11.2 | ProPEX 1-1/2" | ProPEX 1-1/4" | ProPEX 1" | No | 0.19 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1 1/4" PEX | Q4751533 | 17.7 | 2 | Engineered Polymer | 17 | ProPEX 1-1/2" | ProPEX 1-1/4" | ProPEX 1-1/4" | No | 0.21 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1/2" PEX | Q4751550 | 6.3 | 2.4 | Engineered Polymer | 3.4 | ProPEX 1-1/2" | ProPEX 1-1/2" | ProPEX 1/2" | - | 0.14 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 3/4" PEX | Q4751557 | 5.4 | 2.9 | Engineered Polymer | 9 | ProPEX 1-1/2" | ProPEX 1-1/2" | ProPEX 3/4" | - | 0.2 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1" PEX | Q4751551 | 6.9 | 3.1 | Engineered Polymer | 15.3 | ProPEX 1-1/2" | ProPEX 1-1/2" | ProPEX 1" | No | 0.21 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1 1/4" PEX | Q4751553 | 4.1 | 3.2 | Engineered Polymer | 33.7 | ProPEX 1-1/2" | ProPEX 1-1/2" | ProPEX 1-1/4" | - | 0.22 |
| | ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 3/4" PEX | Q4757557 | 16.1 | 2.3 | Engineered Polymer | 5.4 | ProPEX 3/4" | ProPEX 1/2" | ProPEX 3/4" | - | 0.04 |
| | ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1 1/4" PEX | Q4751113 | 6.5 | 1.2 | Engineered Polymer | 28 | ProPEX 1" | ProPEX 1" | ProPEX 1-1/4" | - | 0.13 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1" PEX | Q4751371 | 11.91 | - | - | 12.1 | ProPEX 1-1/4" | ProPEX 3/4" | ProPEX 1" | - | 0.11 |
| | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1 1/4" PEX | Q4751373 | 7.41 | - | - | 12 | ProPEX 1-1/4" | ProPEX 3/4" | ProPEX 1-1/4" | - | 0.13 |
| ✔ | ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 3/4" PEX | Q4751377 | 9.7 | - | - | 12 | ProPEX 1-1/4" | ProPEX 3/4" | ProPEX 3/4" | - | 0.09 |
| | ProPEX EP Reducing Tee, 1" PEX x 1/2" PEX x 1" PEX | Q4751501 | 14.9 | 4.2 | Engineered Polymer | 5.7 | ProPEX 1" | ProPEX 1/2" | ProPEX 1" | - | 0.09 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 1 1/2" PEX | Q4751575 | 7.41 | - | - | 12 | ProPEX 1-1/2" | ProPEX 3/4" | ProPEX 1-1/2" | - | 0.19 |
| | ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 3/4" PEX | Q4751577 | 6.69 | - | - | 11.7 | ProPEX 1-1/2" | ProPEX 3/4" | ProPEX 3/4" | - | 0.13 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1/2" PEX | Q4751750 | 15.1 | 2.4 | Engineered Polymer | 13.2 | ProPEX 1" | ProPEX 3/4" | ProPEX 1/2" | - | 0.07 |
| | ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1 1/4" PEX | Q4751753 | 16.7 | 2.4 | Engineered Polymer | 12 | ProPEX 1" | ProPEX 3/4" | ProPEX 1-1/4" | - | 0.12 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| ProPEX EP reducing tees - up to 1.5in | All | IMC\|UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC | ASTM F1960\|ASTM E119/UL 263\|ASTM E84\|ASTM E814/ULC S115\|ASTM F877\|CSA B137.5\|ULC S102.2\|NSF/ANSI/CAN 61\|ULC S101\|NSF/ANSI 14 | IAPMO-ES\|ICC-ES-PMG\|UL\|U.P.Code\|cQAIus P321\|HUD MR 1269 |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| ProPEX EP Reducing Tee, 1/2" PEX x 1/2" PEX x 3/4" PEX | Q4755575 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 1/2" PEX | Q4757555 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1/2" PEX | Q4757550 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 5/8" PEX | Q4757563 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 3/4" PEX x 3/4" PEX x 1" PEX | Q4757710 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 3/4" PEX | Q4751775 | | | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1" PEX | Q4751751 | | | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1/2" PEX | Q4751150 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 3/4" PEX | Q4751175 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 3/4" PEX | Q4751317 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1" PEX x 1" PEX | Q4751311 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1/2" PEX | Q4751350 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX | Q4751337 | NSPC | UL 1821 | cNSFus-pw-fs |

© 2026 Uponor North America. All Rights Reserved

| | | | | |
|---|---|---|---|---|
| x 1 1/4" PEX x 3/4" PEX | | | | |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 1 1/4" PEX x 1" PEX | Q4751331 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 3/4" PEX | Q4751517 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1" PEX | Q4751511 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1" PEX x 1 1/2" PEX | Q4751505 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 3/4" PEX | Q4751537 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1" PEX | Q4751531 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/4" PEX x 1 1/4" PEX | Q4751533 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1/2" PEX | Q4751550 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 3/4" PEX | Q4751557 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1" PEX | Q4751551 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 1 1/2" PEX x 1 1/4" PEX | Q4751553 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 3/4" PEX x 1/2" PEX x 3/4" PEX | Q4757557 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 1" PEX x 1 1/4" PEX | Q4751113 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1" PEX | Q4751371 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 1 1/4" PEX | Q4751373 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1 1/4" PEX x 3/4" PEX x 3/4" PEX | Q4751377 | NSPC | UL 1821 | cNSFus-pw-fs |
| ProPEX EP Reducing Tee, 1" PEX x 1/2" PEX x 1" PEX | Q4751501 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 1 1/2" PEX | Q4751575 | | UL 1821 | cNSFus-pw |
| ProPEX EP Reducing Tee, 1 1/2" PEX x 3/4" PEX x 3/4" PEX | Q4751577 | | UL 1821 | cNSFus-pw |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1/2" PEX | Q4751750 | NSPC | | cNSFus-pw |
| ProPEX EP Reducing Tee, 1" PEX x 3/4" PEX x 1 1/4" PEX | Q4751753 | NSPC | | cNSFus-pw |

## Installation

Use the appropriate ProPEX ring for PEX-a tubing. Refer to the Uponor Piping Pocket Guide, AquaSAFE™ Residential Fire Sprinkler Installation Guide or Uponor Radiant Installation Handbook for additional information.

## Related applications

PEX-a Plumbing Systems

Hydronic Radiant Heating and Cooling Systems

Turf Conditioning Systems

Permafrost Prevention Systems

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726

© 2026 Uponor North America. All Rights Reserved