Válvula de bola de transición de latón sin plomo (LF)
ProPEX - Presión de cobre

Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
Cold working pressure	250 psi
Temp/pressure ratings	200 °F (93 °C) at 200 psi (13.8 bar)
Prop 65 label required?	Yes

Product information and application use

Estas válvulas de bola de puerto completo con vástagos de acero inoxidable proporcionan un rendimiento confiable y de alto flujo y permiten a los contratistas acelerar las instalaciones en espacios reducidos para una mayor productividad en el lugar de trabajo, al tiempo que ofrecen a los ingenieros oportunidades óptimas de diseño híbrido para cumplir con los requisitos de presión, temperatura y espacio

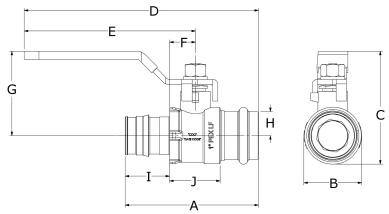

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1/2" PEX x 1/2" Copper Press	LFT4925050SS	2.469	0.974	2.064	4.72	3.425	0.465	1.583	0.38	0.709	1.012
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Copper Press	LFT4927575SS	2.972	1.279	2.415	4.929	3.425	0.524	1.791	0.511	0.945	1.122
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Copper Press	LFT4921010SS	3.539	1.508	2.99	6.22	4.547	0.685	2.236	0.635	1.181	1.453
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Copper Press	LFT4921313SS	4.26	1.856	3.171	6.541	4.547	0.821	2.396	0.775	1.445	1.791
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" Copper Press	LFT4921515SS	5.138	2.118	4.15	8.091	5.638	0.98	3.091	0.907	1.705	2.124
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" Copper Press	LFT4922020SS	6.28	2.823	4.78	8.65	5.638	1.122	3.362	1.159	2.146	2.559
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2 1/2" PEX x 2 1/2" Copper Press	LFT4922525SS	7.945	3.956	6.578	13.121	9.508	1.543	4.619	1.584	2.79	3.159
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3" PEX x 3" Copper Press	LFT4923030SS	9.207	4.606	7.287	13.485	9.508	1.89	4.984	1.844	3.34	3.669

Part name	Part no.	Cv	End Type 1	End Type 2	Weight per UOM [lbs/UOM]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1/2" PEX x 1/2" Copper Press	LFT4925050SS	5.5	ProPEX 1/2"	Copper Press 1/2"	0.33
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" Copper Press	LFT4927575SS	12.6	ProPEX 3/4"	Copper Press 3/4"	0.49
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" Copper Press	LFT4921010SS	22.8	ProPEX 1"	Copper Press 1"	0.84
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Copper Press	LFT4921313SS	31.8	ProPEX 1-1/4"	Copper Press 1-1/4"	1.26
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" Copper Press	LFT4921515SS	41.8	ProPEX 1-1/2"	Copper Press 1-1/2"	1.99
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" Copper Press	LFT4922020SS	67.3	ProPEX 2"	Copper Press 2"	3.17
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2 1/2" PEX x 2 1/2" Copper Press	LFT4922525SS	110.9	ProPEX 2-1/2"	Copper Press 2-1/2"	7.82
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3" PEX x 3" Copper Press	LFT4923030SS	187.2	ProPEX 3"	Copper Press 3"	10.14

© 2026 Uponor North America. All Rights Reserved

Part name	Part no.	Codes	Standards	Listings
Válvula de bola de transición de latón sin plomo (LF) ProPEX - Presión de cobre	All	UPC|IBC|IRC|IPC|NPC of Canada|UMC|IMC	ASME B16.51|ASTM F877|NSF/ANSI/CAN 372|NSF/ANSI 359|ICC-ES LC1002|ASTM F1960|CSA B137.5|NSF/ANSI/CAN 61|NSF/ANSI 14	cNSFus-pw-G|U.P.Code|ICC-PMG-1412
In addition, the following parts have additional codes, standards, or listings:				
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1/2" PEX x 1/2" Copper Press	LFT4925050SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" Copper Press	LFT4921313SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" Copper Press	LFT4921515SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" Copper Press	LFT4922020SS			

Installation	Related applications
Utilice las válvulas de bola de transición de latón ProPEX LF para conexiones roscadas, prensadas y bridas en aplicaciones de tuberías mecánicas y de agua doméstica y HVAC.	-

Footnotes	Contact information	
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517

© 2026 Uponor North America. All Rights Reserved